

Clad Double Hung Screen Pads

Field Applied Installation Instructions

The installation steps listed below should minimize Clad Double Hung screen rattle in adverse wind situations.

Standard Parts Shipped

Adhesive backed foam pads

Screen pin receptacles

You will Need to Supply


Flat screwdriver

ATTENTION: Specifications and technical data are subject to change without notice.

NOTE: Numbers listed in parentheses () are metric equivalents in millimeters rounded to the nearest whole number.


Installation Procedures

1. Remove screen. Inspect head jamb screen channel for screen pads. If none, install adhesive pads into the head jamb screen channel approximately 2" (51) from each edge as shown in illustration 1.

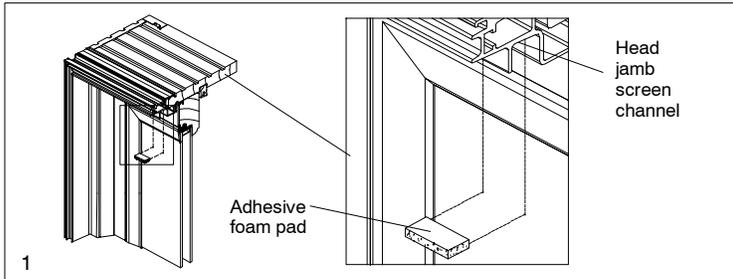

19913206
2011-07-27

2. Replace screen and check for rattle by moving the screen frame inward and outward.
3. If rattle persists, remove screen. Check to determine if you have obsolete screen pin receptacles. They are easily identified by their oval shape. These should be replaced with the supplied new style screen pin receptacles. Note: flat edge.
4. To remove obsolete screen pin receptacles, simply place a flat screwdriver inside the receptacle and pry outward. **Caution: Be sure to pry from within the screen pin receptacle. If you attempt to pry from the outside you could damage the clad finish on the frame.**
5. Replace with new style screen pin receptacle, ensuring the flat side is towards the interior of the frame as shown in illustration 2. Push into position using your finger.

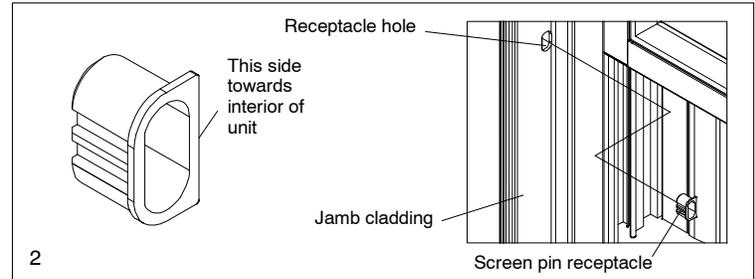

6. Replace screen. Check for rattle. If rattle continues, contact your Marvin dealer or distributor.

Clad Double Hung Screen Pads

Field Applied Installation Instructions

The installation steps listed below should minimize Clad Double Hung screen rattle in adverse wind situations.

Standard Parts Shipped

Adhesive backed foam pads

Screen pin receptacles

You will Need to Supply


Flat screwdriver

ATTENTION: Specifications and technical data are subject to change without notice.

NOTE: Numbers listed in parentheses () are metric equivalents in millimeters rounded to the nearest whole number.


Installation Procedures

1. Remove screen. Inspect head jamb screen channel for screen pads. If none, install adhesive pads into the head jamb screen channel approximately 2" (51) from each edge as shown in illustration 1.

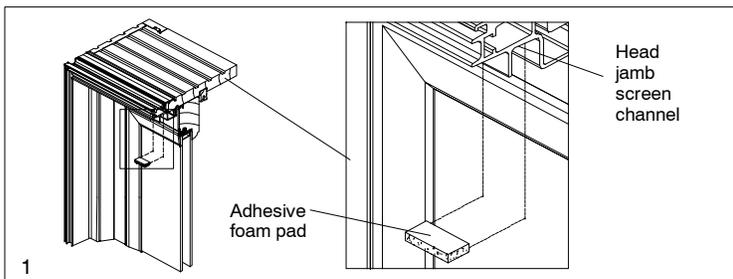

19913206
2011-07-27

2. Replace screen and check for rattle by moving the screen frame inward and outward.
3. If rattle persists, remove screen. Check to determine if you have obsolete screen pin receptacles. They are easily identified by their oval shape. These should be replaced with the supplied new style screen pin receptacles. Note: flat edge.
4. To remove obsolete screen pin receptacles, simply place a flat screwdriver inside the receptacle and pry outward. **Caution: Be sure to pry from within the screen pin receptacle. If you attempt to pry from the outside you could damage the clad finish on the frame.**
5. Replace with new style screen pin receptacle, ensuring the flat side is towards the interior of the frame as shown in illustration 2. Push into position using your finger.

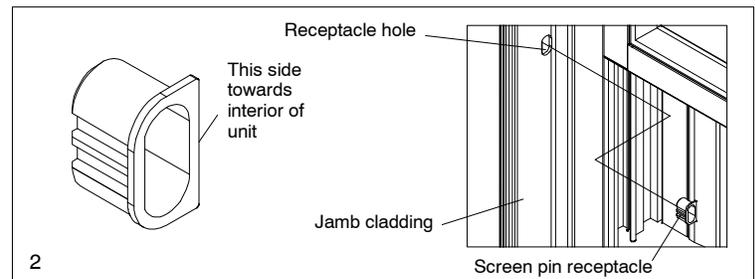

6. Replace screen. Check for rattle. If rattle continues, contact your Marvin dealer or distributor.