

Clad Ultimate Casement Collection

Unit Features.....	1
Lite Options	3
Optional Interior Square Simulated Divided Lite	5

Clad Ultimate Casement Collection

Unit Features

Ultimate Casement Collection:

Clad Ultimate Casement (CUCA), Clad Ultimate Awning (CUAWN), Clad Ultimate Casement Picture (CUCAP)
Clad Ultimate Casement Bows and Bays (CUCABB), Clad Ultimate Casement Round Top (CUCART)
Clad Ultimate Push Out Casement (CUPCA), Clad Ultimate Push Out Awning (CUPAWN)
Clad Ultimate Push Out Casement Picture (CUPCAP), Clad Ultimate Push Out Casement Bows and Bays (CUPCABB)
Clad Ultimate French Casement (CUFCA), Clad Ultimate Push Out French Casement (CUPFCA)
Clad Ultimate Venting Picture (CUCAVP), Clad Ultimate Casement Polygon (CUCAPOLY)
Clad Ultimate Replacement Casement (CURCA), Clad Ultimate Replace Awning (CURAWN)
Clad Ultimate Replacement Casement Picture (CURCAP)
Clad Ultimate Replacement Push Out Casement (CURPCA), Clad Ultimate Replacement Push Out Awning (CURPAWN)
Clad Ultimate Replacement Push Out Casement Picture (CURPCAP)
Clad Ultimate Replacement Push Out French Casement (CURPFCA)
Clad Ultimate Replacement Casement Round Top (CURCART), Clad Ultimate Replacement Casement Polygon (CURCAPOLY)

NOTE: Clad Ultimate French Casement, Clad Ultimate Push Out French Casement, Clad Ultimate Venting Picture, Clad Ultimate Replacement Push Out French are not available with CE mark.

Bows and Bays are not available with CE mark from the factory. Bow and Bay kits are available for field mulling.

Frame:

- Frame thickness: 1 3/16" (30)
- Full frame units have a frame base (with pre-drilled installation holes in jambs): is 4 9/16" (116) from backside of nailing fin to interior wood face of frame
- Replacement frame: Units have overall base frame of 3 1/4" (83) jambs
- Frame bevel: Standard is no bevel, optional available are 8 degree bevel and 14 degree bevel

Sash:

- Nominal Sash thickness for full frame:
 - 1 5/8" (41) with 3/4" (19) insulating glass
 - 1 7/8" (48) with 1" (25) insulating glass
- Nominal Sash thickness for replacement frame: 1 5/8" (4) with 3/4" (19) insulating glass
- Stile and Rails 2 1/16" (52) standard
- Optional tall bottom rail 3 9/16" (90) available
- Standard interior wood cope sticking: Ogee
- Optional interior wood cope sticking: Ovolo and Square

Hardware: - See Individual Product Chapters

Insect Screen:

- Standard is a full size roll formed aluminum surround, in Satin Taupe, optional Stone White or Bronze
- Optional wood screen available
- Standard screen mesh: Charcoal Fiberglass
- Optional screen mesh: High Transparency, Silver Gray Fiberglass, Charcoal Aluminum, Black Aluminum, Bright Aluminum, or Aluminum Bright Bronze

Wood Interior Swinging Insect Screens:

- Wood screen surround: Matches window species.
- Screen mesh: Charcoal High Transparency (CH HI-Tran) fiberglass.
- Ball and Catch latch system used.
- Screen mesh options: Charcoal Fiberglass, Silver Gray Fiberglass, Charcoal Aluminum, Black Aluminum, Bright Aluminum and Bright Bronze.

Unit Features

Retractable Screen:

- The screen and its associated hardware shall have minimal exposure and shall not interfere with commonly used window dressings
- Standard screen mesh: stiffened high transparency mesh
- Visible interior screen is all wood
- Species: Pine
 - Alternate species: Mahogany and Vertical Grain Douglas Fir
- Incorporated weather seal that provided optimal seal
- Color matched to gliding block
- Adjustable gliding block
 - Standard color: beige
 - Optional color: black and white
- Optional pull handle: factory applied or shipped loose
- Colors: Satin Taupe, Bronze, Stone White, Brass, Antique Brass, Polished Chrome, Satin Chrome, Oil Rubbed Bronze, Satin Nickel

Weather Strip:

- Frame weather strip is made of a foamed EPDM material with a hollow built in it to reduce compression force. The material is UV resistant, durable, has a low COE, and is flexible enough to be bent around 90 degree corners to allow for fewer seams in it around the frame. It is only available in beige.
- Sash weather strip is made of glass filled polypropylene material and is formulated to be UV resistant, have low COE, and slide easily in and out of frame. Standard color is beige, with optional black or white.

Glass:

- Glazing seal: Silicone glazed
- Standard glass: Insulating Low E2 Argon or Air
- Optional glazing: Low E1 Argon or Air, Low E3 Argon or Air, clear, tints, tempered, obscure
- Insulating glass will be altitude adjusted with capillary tubes for higher elevations
- Argon gas is not available for elevations that require capillary tubes
- See unit features in product sections for Tripane glass options


CE Optional Glazing:

- Glazing seal: silicone glazed
- Standard glass: Insulating Low E2 Argon or air
- Optional glazing available: Low E1 Argon or air, Low E3 Argon or air, clear, laminated clear & tints, tempered, sandblasted
- Glass panes available in 3, 4, and 6 mm thicknesses
- Laminated panes available in 7.0 and 7.8 mm thicknesses
- Insulating glass will be altitude adjusted with capillary tubes for higher elevations
- Argon gas is not available for elevations that require capillary tubes
- See unit features in product sections for Tripane glass options


Interior Sticking Options:

- Standard interior sticking: Ogee
- Optional interior sticking: Ovolo or Square


Ogee




Ovolo




Square




Lite Options

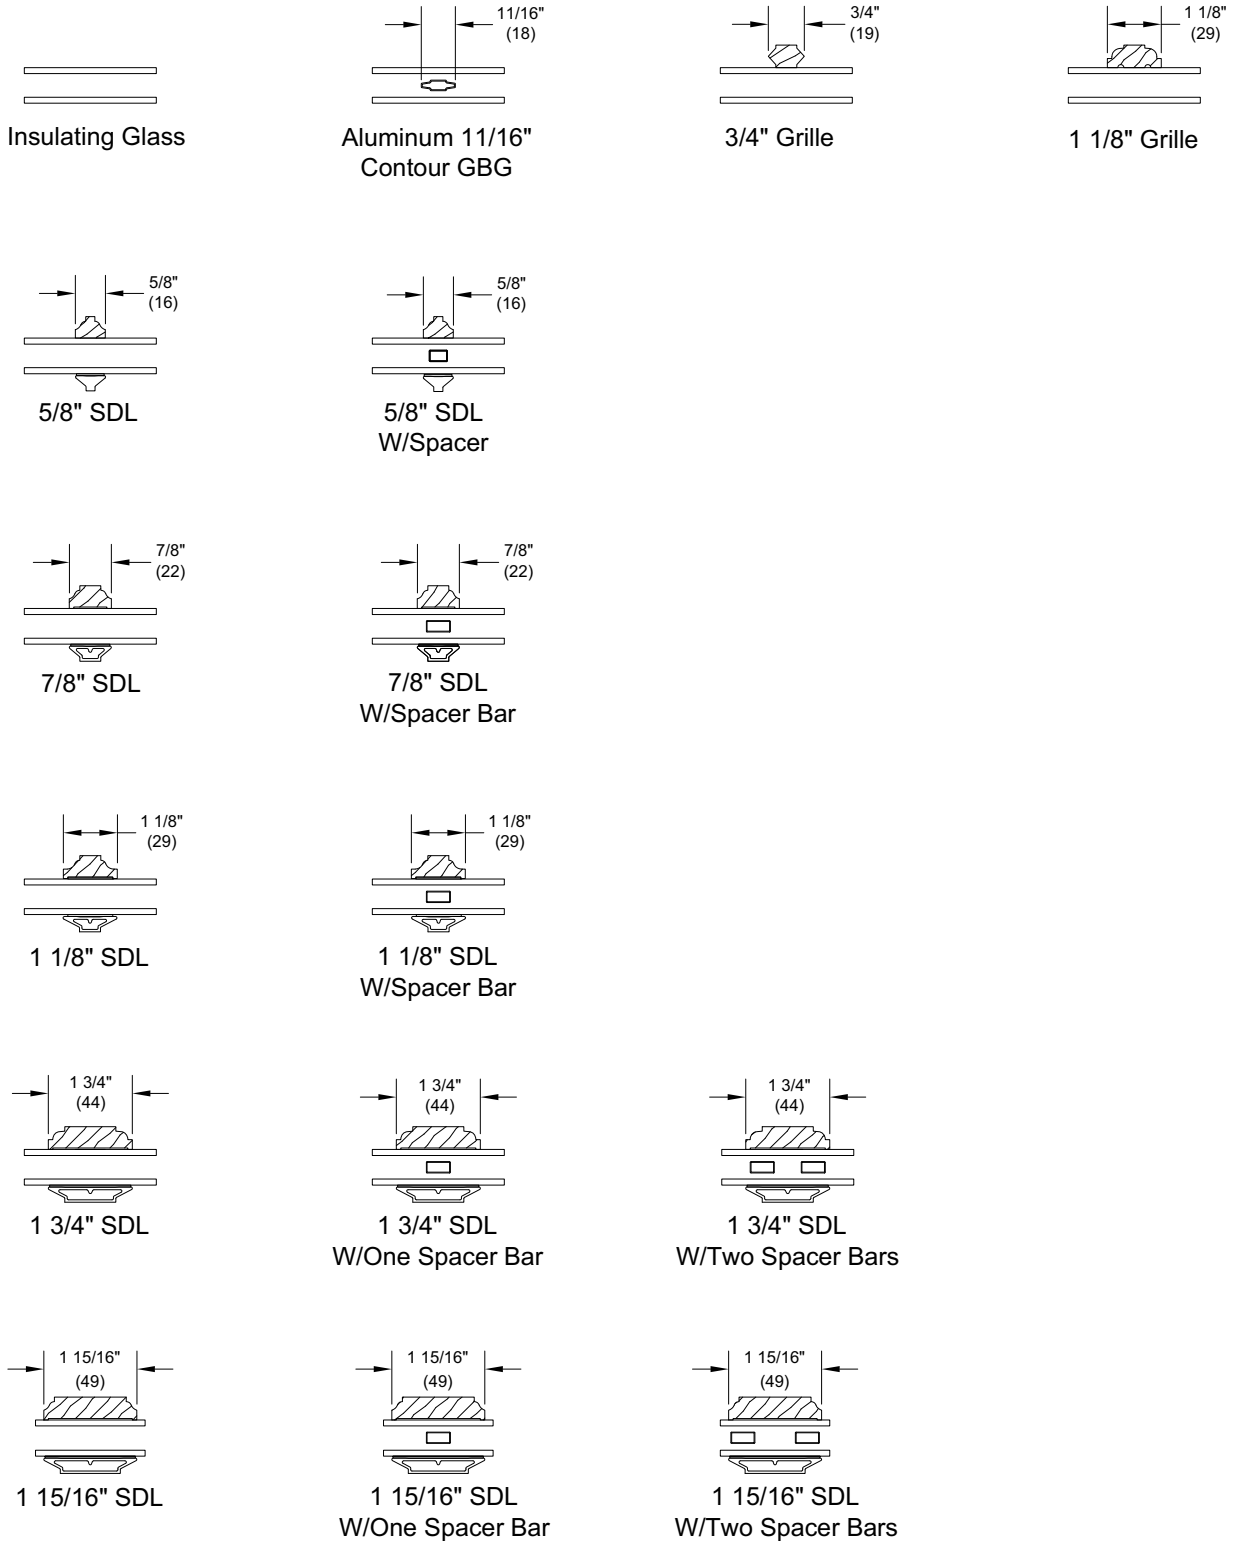


Lite Options




2 13/32" SDL




2 13/32" SDL
W/One Spacer Bar




2 13/32" SDL
W/Two Spacer Bars



2 13/32" SDL
Optional Double Hung



2 13/32" SDL
W/One Spacer Bar
Optional Double Hung



2 13/32" SDL
W/Two Spacer Bars
Optional Double Hung

Clad Ultimate Casement Collection

Optional Interior Square Simulated Divided Lite

