Factory Applied Casement
Window Opening Control Device Operating Instruction

This instruction is for Marvin Ultimate Casement (UCA), Infinity Casement (NCA/NINCA), Integrity Wood-Ultrex Casement (ICA), and Integrity All Ultrex Casement (IFCA). Follow all installation instructions provided. The window opening control device meets the requirements of ASTM F2090-10.

NOTE: Leave a copy of the safety information for the building owner and building occupant, if applicable where the device is located.

CAUTION

All building and fire codes should be consulted before installing window units with factory installed window opening control devices. Contact local building code department or fire department for specific codes. **Do not** remove window opening control device at any time, improper reapplication may result in the device being ineffective in preventing falls through an open window.

NOTE: Numbers listed in parentheses ( ) are metric equivalents in millimeters rounded to the nearest whole number.

WARNING!



Possible Fall Hazard: Young children may fall out of the window if the window fall prevention device is not installed correctly. When properly engaged, no space shall exist at the lowest opening portion of the window opening that would permit the passage of a rigid sphere measuring 4" (102) in diameter.

Maximum unit size device is intended for:		
Unit	**Frame Size**	
ICA	36.00" (914) x 71.125" (1807)	
IFCA	35.50" (902) x 71.500" (1816)	
NCA, NINCA	>36.00" (914) Width	40.00" (1016) x 60.00" (1524)
	≤36.00" (914) Width	36.00" (914) x 86.00" (2184)
CUCA, CURCA, CUCART	≤36.00" (914) Width	36.00" (914) x 96.125" (2442)
	≤36.00" (914) Width	36.00" (914) x 96.125" (2442)
WUCA, WURCA, WUCART	>36.00" (914) Width	40.00" (1016) x 92.063" (2338)
	≤36.00" (914) Width	40.00" (1016) x 97.063" (2465)

Operating Instructions

Disengaging the Window Opening Control Device

1. Unlock window.
2. Open sash.
3. Depress red lock button and hold.
4. Slide lock lever toward the lock button and the locking bullet will retract into the tether housing on the sash.

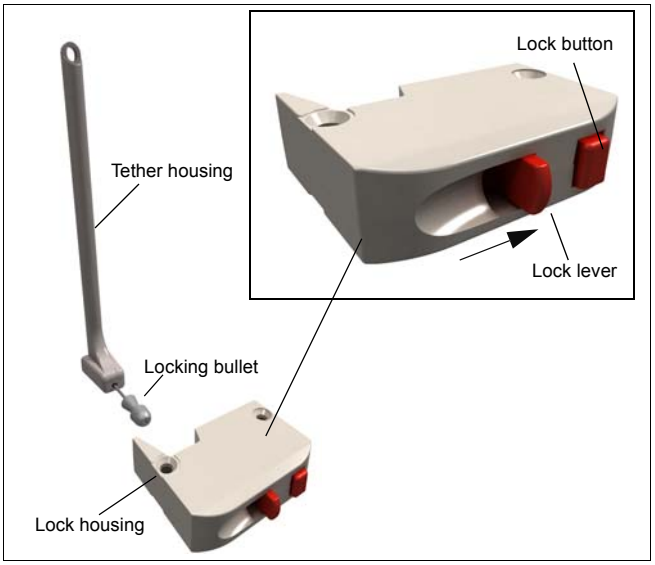

Reset the Window Opening Control Device

1. Close sash.
2. Lock window.

NOTE: Once installation of unit is complete, check window opening control device for proper operability. When the sash is closed and locked the window opening control device should automatically engage.

19972238