

# CLAD ULTIMATE CASEMENT VENTING PICTURE

<b>MO (mm)</b>	1-4 1/2 (419)	1-6 1/2 (470)	1-8 1/2 (521)	2-0 1/2 (622)	2-2 1/2 (673)	2-4 1/2 (724)	2-6 1/2 (775)	2-8 1/2 (826)
<b>RO (mm)</b>	1-5 (492)	1-7 (483)	1-9 (533)	2-1 (635)	2-3 (686)	2-5 (737)	2-7 (787)	2-9 (838)
<b>FS (mm)</b>	1-4 (406)	1-6 (457)	1-8 (508)	2-0 (610)	2-2 (660)	2-4 (711)	2-6 (762)	2-8 (813)
<b>DLO (mm)</b>	0-10 3/16 (259)	1-0 3/16 (310)	1-2 3/16 (360)	1-6 3/16 (462)	1-8 3/16 (513)	1-10 3/16 (564)	2-0 3/16 (614)	2-2 3/16 (665)

2-11 3/8 (898) 2-11 5/8 (904) 2-11 1/8 (892) 2-5 21/64 (745)								
3-3 3/8 (1000) 3-3 5/8 (1006) 3-3 1/8 (993) 2-9 21/64 (847)								
3-7 3/8 (1101) 3-7 5/8 (1108) 3-7 1/8 (1095) 3-1 21/64 (948)								
3-11 3/8 (1203) 3-11 5/8 (1209) 3-11 1/8 (1196) 3-5 21/64 (1050)								
4-5 3/8 (1355) 4-5 5/8 (1362) 4-5 1/8 (1349) 3-11 21/64 (1202)								
4-7 3/8 (1406) 4-7 5/8 (1412) 4-7 1/8 (1400) 4-1 21/64 (1253)								
4-11 3/8 (1508) 4-11 5/8 (1514) 4-11 1/8 (1501) 4-5 21/64 (1355)								

Clad Ultimate Casement Venting Picture: **CUCAVP**

# CLAD ULTIMATE CASEMENT VENTING PICTURE

<b>MO (mm)</b>	3-0 1/2 (927)	3-4 1/2 (1029)	4-0 1/2 (1232)	4-8 1/2 (1435)	5-0 1/2 (1537)	5-4 1/2 (1638)	6-0 1/2 (1842)
<b>RO (mm)</b>	3-1 (940)	3-5 (1041)	4-1 (1245)	4-9 (1448)	5-1 (1549)	5-5 (1651)	6-1 (1854)
<b>FS (mm)</b>	3-0 (914)	3-4 (1016)	4-0 (1219)	4-8 (1422)	5-0 (1524)	5-4 (1626)	6-0 (1829)
<b>DLO (mm)</b>	2-6 3/16 (767)	2-10 3/16 (868)	3-6 3/16 (1072)	4-2 3/16 (1275)	4-6 3/16 (1376)	4-10 3/16 (1478)	5-6 3/16 (1681)

2-11 3/8 (898) 2-11 5/8 (904) 2-11 1/8 (892) 2-5 21/64 (745)							
3-3 3/8 (1000) 3-3 5/8 (1006) 3-3 1/8 (993) 2-9 21/64 (847)							
3-7 3/8 (1101) 3-7 5/8 (1108) 3-7 1/8 (1095) 3-1 21/64 (948)							
3-11 3/8 (1203) 3-11 5/8 (1209) 3-11 1/8 (1196) 3-5 21/64 (1050)							
4-5 3/8 (1355) 4-5 5/8 (1362) 4-5 1/8 (1349) 3-11 21/64 (1202)							
4-7 3/8 (1406) 4-7 5/8 (1412) 4-7 1/8 (1400) 4-1 21/64 (1253)							
4-11 3/8 (1508) 4-11 5/8 (1514) 4-11 1/8 (1501) 4-5 21/64 (1355)							


## NOTES:

\* Units will have structural cable on the head and sill.

T For safety and/or code requirements, Marvin® recommends tempered glass in all units with a frame size height of 71 1/8" or larger and units with frame size 25.2 sq. ft. and larger.


# CLAD ULTIMATE CASEMENT VENTING PICTURE

<b>MO (mm)</b>	1-4 1/2 (419)	1-6 1/2 (470)	1-8 1/2 (521)	2-0 1/2 (622)	2-2 1/2 (673)	2-4 1/2 (724)	2-6 1/2 (775)	2-8 1/2 (826)
<b>RO (mm)</b>	1-5 (492)	1-7 (483)	1-9 (533)	2-1 (635)	2-3 (686)	2-5 (737)	2-7 (787)	2-9 (838)
<b>FS (mm)</b>	1-4 (406)	1-6 (457)	1-8 (508)	2-0 (610)	2-2 (660)	2-4 (711)	2-6 (762)	2-8 (813)
<b>DLO (mm)</b>	0-10 3/16 (259)	1-0 3/16 (310)	1-2 3/16 (360)	1-6 3/16 (462)	1-8 3/16 (513)	1-10 3/16 (564)	2-0 3/16 (614)	2-2 3/16 (665)

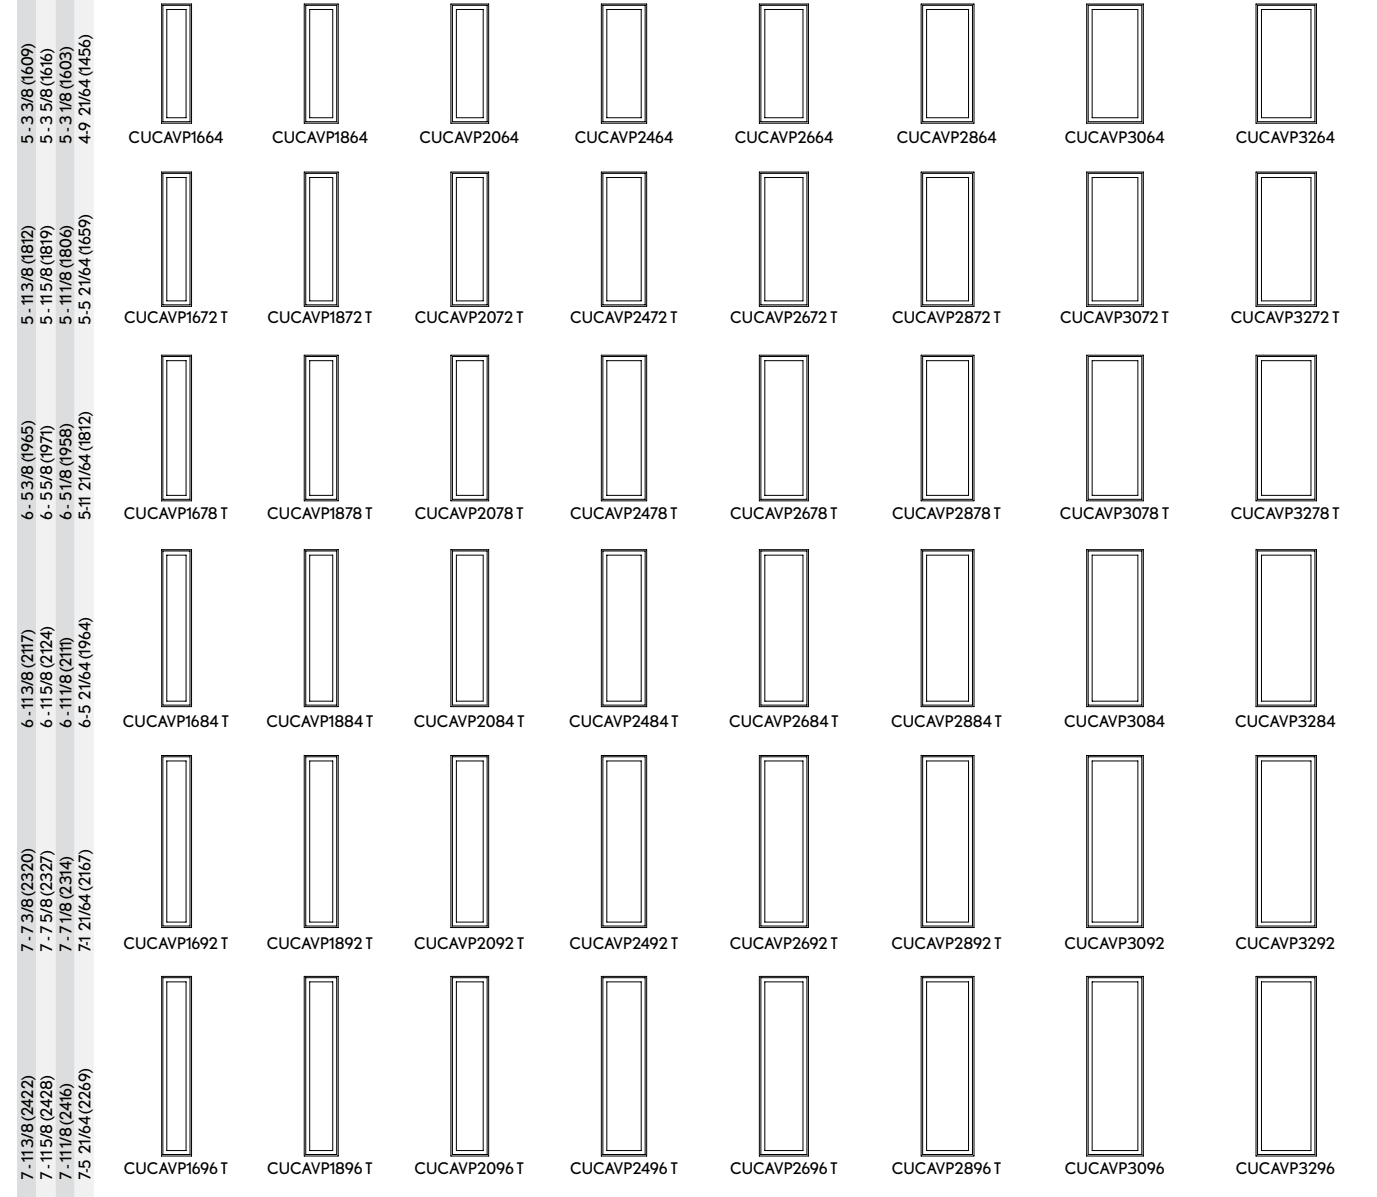

# CLAD ULTIMATE CASEMENT VENTING PICTURE

<b>MO (mm)</b>	3-0 1/2 (927)	3-4 1/2 (1029)	4-0 1/2 (1232)	4-8 1/2 (1435)	5-0 1/2 (1537)	5-4 1/2 (1638)	6-0 1/2 (1842)
<b>RO (mm)</b>	3-1 (940)	3-5 (1041)	4-1 (1245)	4-9 (1448)	5-1 (1549)	5-5 (1651)	6-1 (1854)
<b>FS (mm)</b>	3-0 (914)	3-4 (1016)	4-0 (1219)	4-8 (1422)	5-0 (1524)	5-4 (1626)	6-0 (1829)
<b>DLO (mm)</b>	2-6 3/16 (767)	2-10 3/16 (868)	3-6 3/16 (1072)	4-2 3/16 (1275)	4-6 3/16 (1376)	4-10 3/16 (1478)	5-6 3/16 (1681)

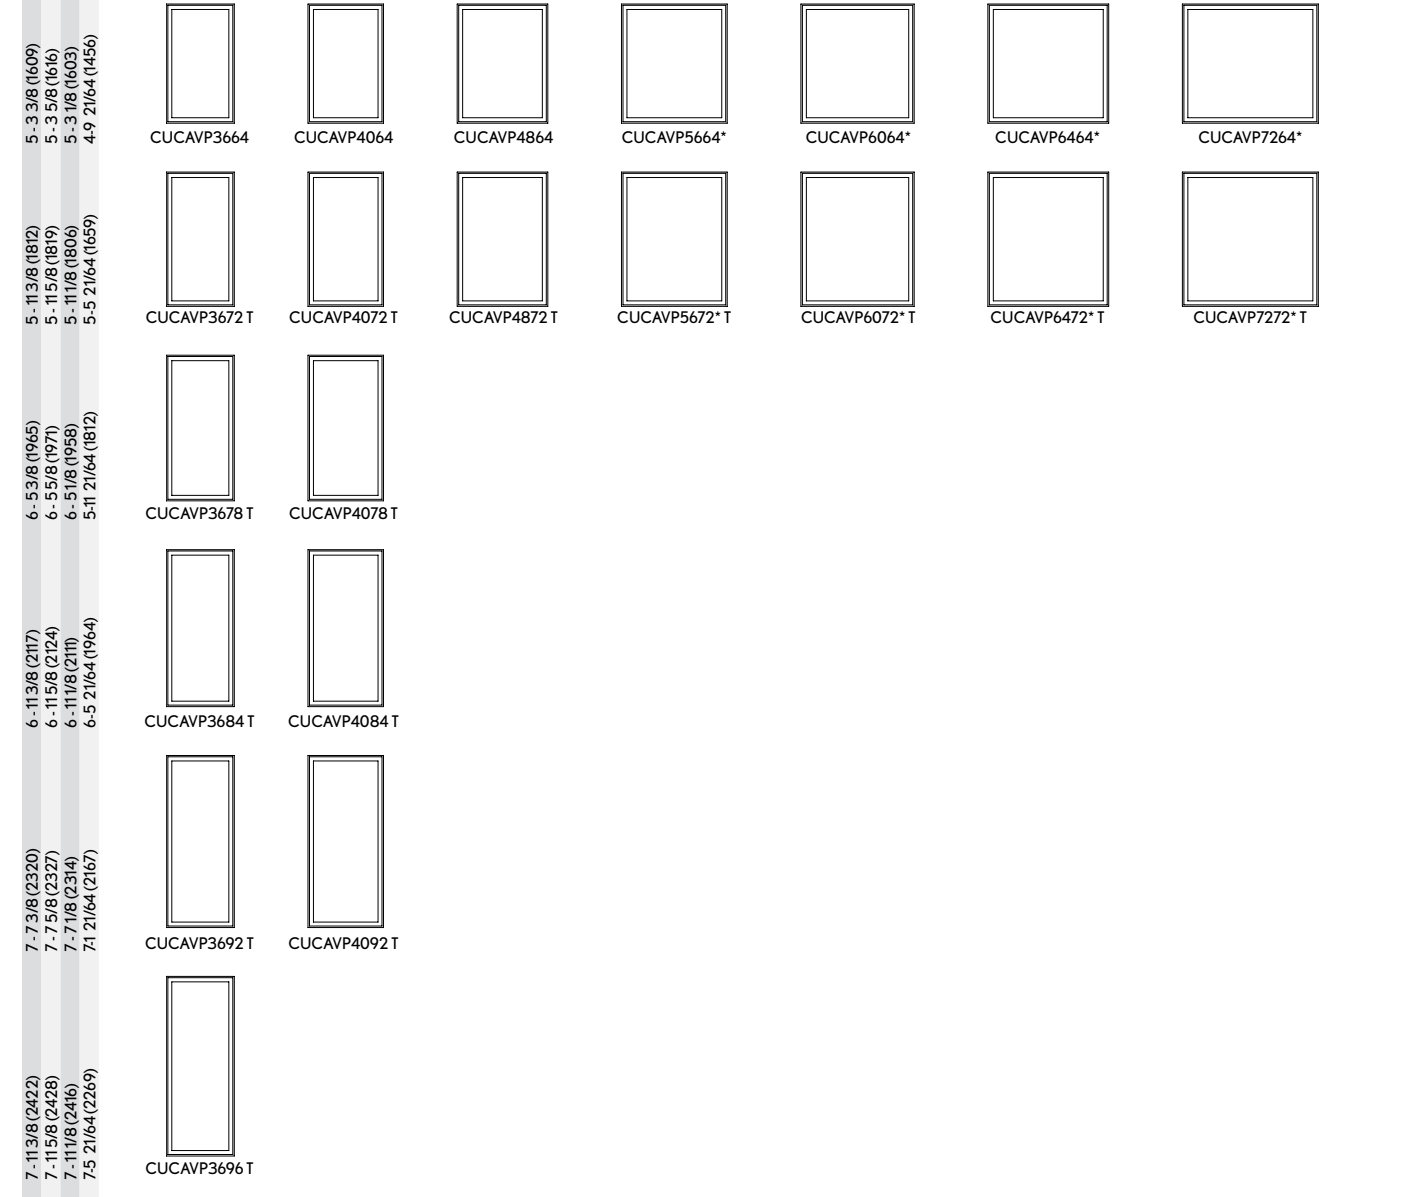

## NOTES:

- \* Units will have structural cable on the head and sill.
- T For safety and/or code requirements, Marvin® recommends tempered glass in all units with a frame size height of 71 1/8" or larger and units with frame size 25.2 sq. ft. and larger.