


Integrity Accessories


Wood-Ultrex Installation Brackets and Nailing Fin	1
Wood-Ultrex Interior Accessories	2
All Ultrex Installation Brackets and Nailing Fin	3
All Ultrex Exterior Accessories	4
All Ultrex Interior Accessories	5
Wood-Ultrex and All Ultrex Exterior Casing Elevations	6
Wood-Ultrex and All Ultrex Exterior Casing Profiles and Parts	7
Wood-Ultrex Exterior Casing Measurement Conversions	8
All Ultrex Exterior Casing Measurement Conversions	9
Wood-Ultrex and All Ultrex Exterior Casing Applications for Windows	10
Wood-Ultrex and All Ultrex Exterior Casing Applications for Windows	11

Wood-Ultrex Installation Brackets and Nailing Fin


Installation Brackets / Nailing Fin / Drip Cap







Masonry Bracket




Installation Clip

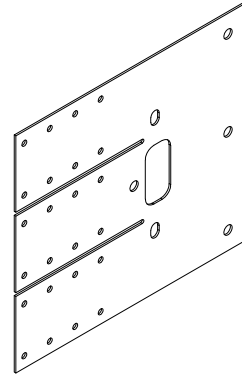


Masonry Bracket

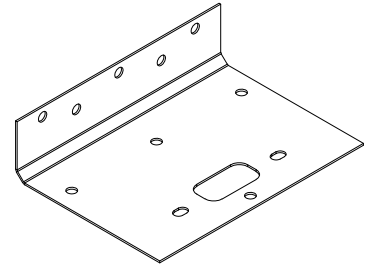

Nail Fin Installation Kit - Impact



V119
Head Jamb Nailing
Fin/DripCap
Note: Drip Cap is Clear



V110
Radius Head Jamb
Nailing Fin/DripCap




V104
Jamb Nailing Fin




V084
Sill Nailing Fin

Wood-Ultrex Interior Accessories


Jamb Extension




W7432
6 9/16" Jamb Extension



W7119
IIFD To Direct Glaze Jamb
6 9/16" Jamb Extension




W7446
6 13/16" Jamb Extension




W2214
IIFD 1/4" Jamb Extension
For 6 13/16"


Interior Mull Trim




W1241
Interior Mull Trim




W9159
Horizontal Mull Trim




W1242
Interior Mull Trim



W1243
Interior Mull Trim




W6172
Mull Filler Block




W7004
Sill Standing Block & Mull Tie

All Ultrex Installation Brackets and Nailing Fin

Installation Bracket



4 9/16" Structural Bracket



6 9/16" Structural Bracket


Nailing Fin / Drip Cap



V1428
Nailing Fin
Windows and Doors




V2067
Nailing Fin Radius
Windows




V2395
Nailing Fin With Drip Cap
Windows and Doors

Frame Expander




V2034
1" Frame Expander




V1780
3" Frame Expander

Flush Fin




V2056
1 3/4" Flush Fin




Flush Fin Corner Key


J-Channel



V1458
J-Channel
Note: Mitered Corners








J-Channel
Corner Key








J-Channel
Corner Key
Adjustable

All Ultrex Interior Accessories



Jamb Extension - Stone White

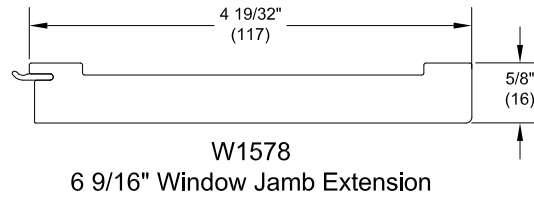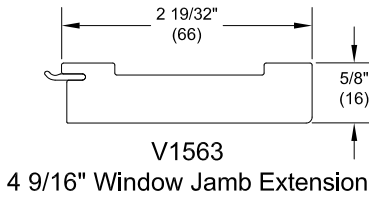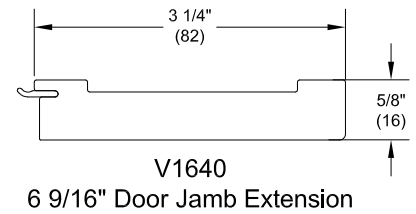


Jamb Extension - Dark Interior

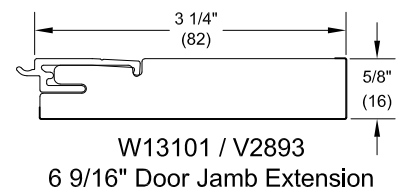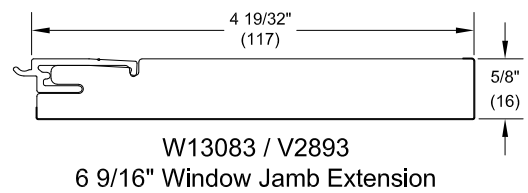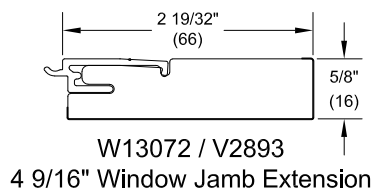


Drywall Return and Receiver - Available In Stone White, Bronze and Ebony




Interior Frame Filler - Available In Stone White, Bronze and Ebony




Wood-Ultrex and All Ultrex Exterior Casing Elevations




BMC - Flush
With Sill Nosing




BMC - Mitered
Casing Four Sides




Flat Casing - Flush
With Sill Nosing




Flat Casing - Flush
Casing Four Sides




Flat Casing - Ranch Style
With Sill Nosing




Flat Casing - Ranch Style
Casing Four Sides



BMC




Flat




Ranch Style

NOTE: Ranch Style casing overhangs each side by 1" (25)


Wood-Ultrex and All Ultrex Exterior Casing Profiles and Parts




F9107
Sill Nosing - 2"




F9105
BMC - 2"




V2177
Wood Ultrex
Connection Barb




V2691
All Ultrex
Connection Barb




F9108
Flat Casing - 3.5"



Exterior Casing
Corner Key



End Cap
Flat Casing, 3.5"




End Cap
Sill



#7 X .750" Type A-17 PH full thread



Reticulated Foam
.625" X .625"



BMC
Plug

Wood-Ultrex Exterior Casing Measurement Conversions

Frame Outside Measurement (Wood Ultrex) to Exterior Casing Individual Part Finished Overall Length		
Wood Ultrex Windows		
Exterior Casing Configuration	Part	WU Conversion
BMC (all four sides)	Header & Sill 45° end cuts	+ 3 3/8"
	Jambs 45° end cuts	+ 3 3/8"
BMC w/ Sill Nosing	Header 45° end cuts	+ 3 3/8"
	Sill 90° end cuts	+ 2 7/8"
	Jambs 45° end cuts on header end 90° end cuts on sill end	+ 1 3/8"
3.5" Flat Casing (all four sides)	Header & Sill 90° end cuts	+ 6 7/32"
	Jambs 90° end cuts	- 5/8"
3.5" Flat Casing w/ Sill Nosing	Header 90° end cuts	+ 6 7/32"
	Sill 90° end cuts	+ 5 7/8"
	Jambs 90° end cuts	- 5/8"
3.5" Flat Casing - Ranch Style	Header & Sill 90° end cuts	+ 8 7/32"
	Jambs 90° end cuts	- 5/8"
3.5" Flat Casing - Ranch Style w/ Sill Nosing	Header 90° end cuts	+ 8 7/32"
	Sill 90° end cuts	+ 7 7/8"
	Jambs 90° end cuts	- 5/8"
Wood Ultrex Doors		
Exterior Casing Configuration	Part	WU Conversion
BMC	Header 45° end cuts	+ 3 3/8"
	Jambs 45° end cuts on header end 90° end cuts on sill end	+ 1 11/16"
3.5" Flat Casing	Header 90° end cuts	+ 6 7/32"
	Jambs 90° end cuts	- 3/8"
3.5" Flat Casing - Ranch Style	Header 90° end cuts	+ 8 7/32"
	Jambs 90° end cuts	- 3/8"
Frame Outside Measurement (Wood Ultrex) to Exterior Casing Outside Measurement Conversion		
Wood Ultrex Windows		
Exterior Casing Configuration	Width	Height
BMC (all four sides)	+ 3 3/8"	+ 3 3/8"
BMC w/ Sill Nosing	+ 3 3/8"	+ 3 3/8"
3.5" Flat Casing (all four sides)	+ 6 3/8"	+ 6 3/8"
3.5" Flat Casing w/ Sill Nosing	+ 6 3/8"	+ 4 7/8"
3.5" Flat Casing — Ranch Style	+ 8 3/8"*	+ 6 3/8"
3.5" Flat Casing — Ranch Style w/ Sill Nosing	+ 8 3/8"*	+ 4 7/8"
Wood Ultrex Doors		
Exterior Casing Configuration	Width	Height
BMC (header & jambs)	+ 3 3/8"	+ 1 11/16"
3.5" Flat Casing (header & jambs)	+ 6 3/8"	+ 3 3/16"
3.5 Flat Casing — Ranch Style (header & jambs)	+ 8 3/8"*	+ 3 3/16"
* Ranch Style header overhangs each jamb & does not have square or rectangle outer shape — see diagrams on page 6		

All Ultrex Exterior Casing Measurement Conversions


Frame Outside Measurement (All-Ultrex) to Exterior Casing Individual Part Finished Overall Length		
All Ultrex Windows		
Exterior Casing Configuration	Part	AU Conversion
BMC (all four sides)	Header & Sill 45° end cuts	+ 3 11/16"
	Jambs 45° end cuts	+ 3 11/16"
BMC w/ Sill Nosing	Header 45° end cuts	+ 3 11/16"
	Sill 90° end cuts	+ 3 3/16"
	Jambs 45° end cuts on header end 90° end cuts on sill end	+ 1 11/16"
3.5" Flat Casing (all four sides)	Header & Sill 90° end cuts	+ 6 17/32"
	Jambs 90° end cuts	- 5/16"
3.5" Flat Casing w/ Sill Nosing	Header 90° end cuts	+ 6 17/32"
	Sill 90° end cuts	+ 6 3/16"
	Jambs 90° end cuts	- 5/16"
3.5" Flat Casing - Ranch Style	Header & Sill 90° end cuts	+ 8 17/32"
	Jambs 90° end cuts	- 5/16"
3.5" Flat Casing - Ranch Style w/ Sill Nosing	Header 90° end cuts	+ 8 17/32"
	Sill 90° end cuts	+ 8 3/16"
	Jambs 90° end cuts	- 5/16"
All Ultrex Doors		
Exterior Casing Configuration	Part	AU Conversion
BMC	Header 45° end cuts	+ 3 11/16"
	Jambs 45° end cuts on header end 90° end cuts on sill end	+ 1 27/32"
3.5" Flat Casing	Header 90° end cuts	+ 6 17/32"
	Jambs 90° end cuts	- 1/4"
3.5" Flat Casing - Ranch Style	Header 90° end cuts	+ 8 17/32"
	Jambs 90° end cuts	- 1/4"

Frame Outside Measurement (All-Ultrex) to Exterior Casing Outside Measurement Conversion		
All Ultrex Windows		
Exterior Casing Configuration	Width	Height
BMC (all four sides)	+ 3 11/16"	+ 3 11/16"
BMC w/ Sill Nosing	+ 3 11/16"	+ 3 11/16"
3.5" Flat Casing (all four sides)	+6 11/16"	+6 11/16"
3.5" Flat Casing w/ Sill Nosing	+6 11/16"	+5 3/16"
3.5" Flat Casing — Ranch Style	+8 11/16"*	+6 11/16"
3.5" Flat Casing — Ranch Style w/ Sill Nosing	+8 11/16"*	+5 3/16"
All Ultrex Doors		
Exterior Casing Configuration	Width	Height
BMC (header & jambs)	+3 11/16"	+1 13/16"
3.5" Flat Casing (header & jambs)	+6 11/16"	+3 11/32"
3.5 Flat Casing — Ranch Style (header & jambs)	+8 11/16"*	+3 11/32"

* Ranch Style header overhangs each jamb & does not have square or rectangle outer shape — see diagrams on page 6


Wood-Ultrex and All Ultrex Exterior Casing Applications for Windows

IDGDH Polygon with BMC and Sill Casing

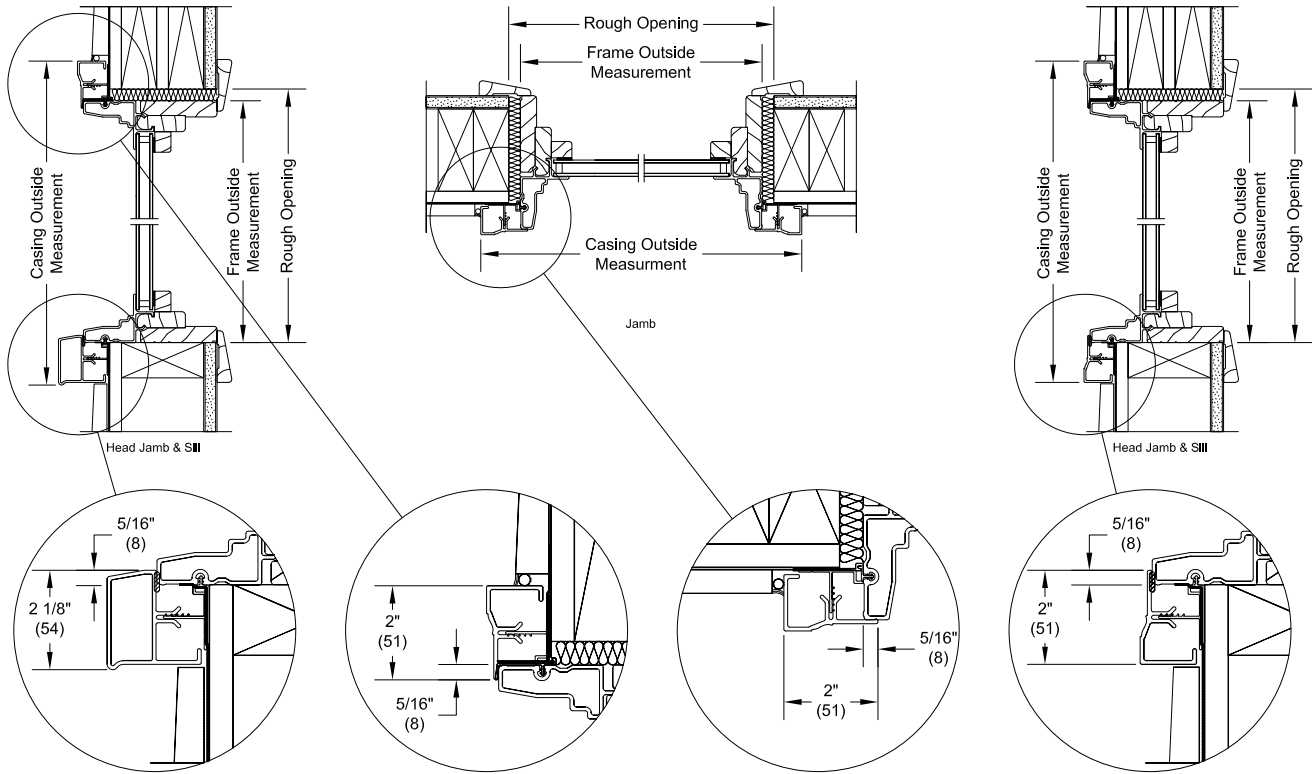

NOTE: Installation requires a minimum of 1" (25). Projections greater than 1" (25) may require connection bars to be shimmed away from sheeting for compensation.


IDGDH Polygon with Flat Casing and Sill Casing

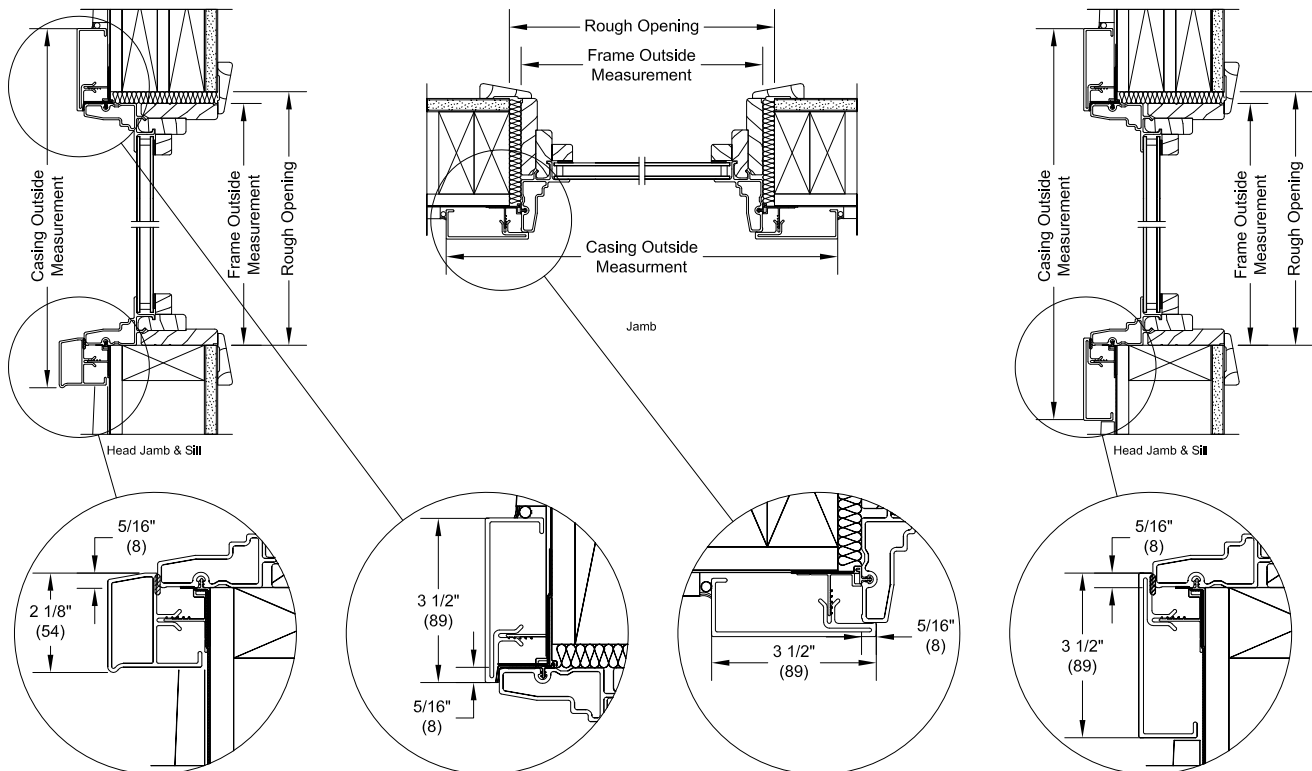

NOTE: The 5/16" measurement shown is for Wood-Ultrex. The dimension for All Ultrex is 5/32".


Wood-Ultrex and All Ultrex Exterior Casing Applications for Doors

ISFD with BMC

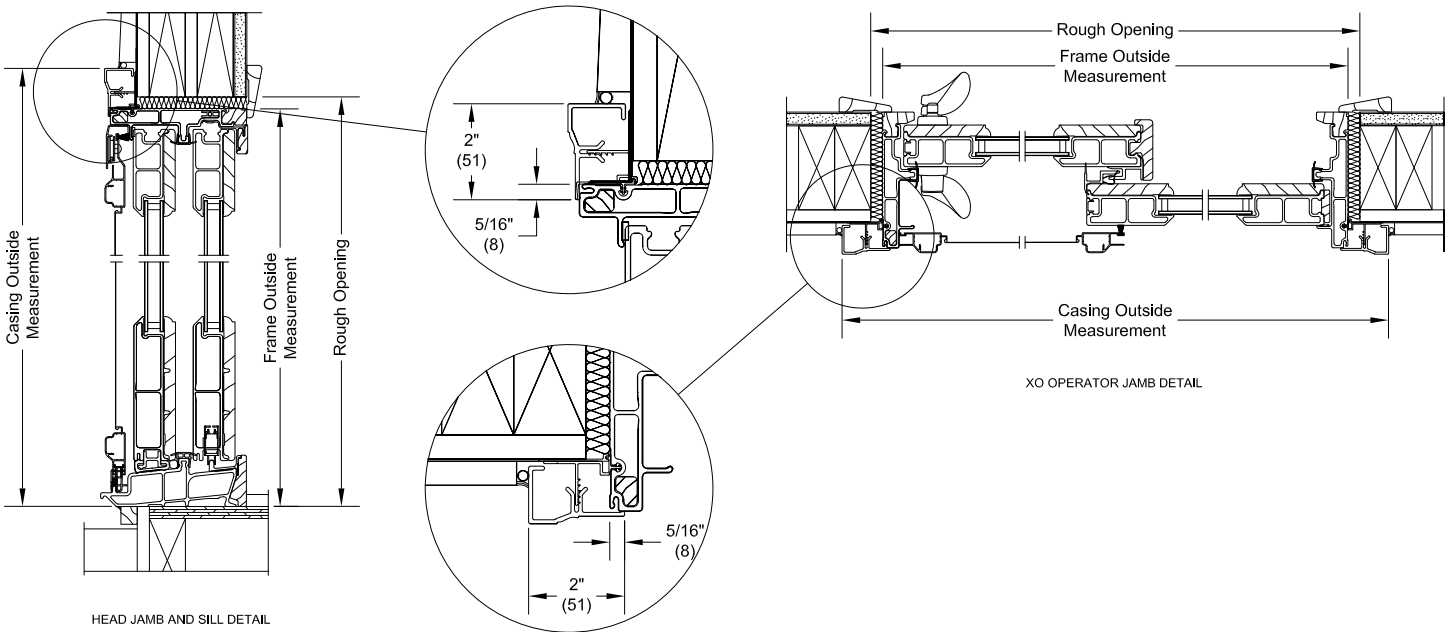

NOTE: Installation requires a minimum of 1" (25). Projections greater than 1" (25) may require connection bars to be shimmed away from sheeting for compensation.

ISFD with Flat Casing

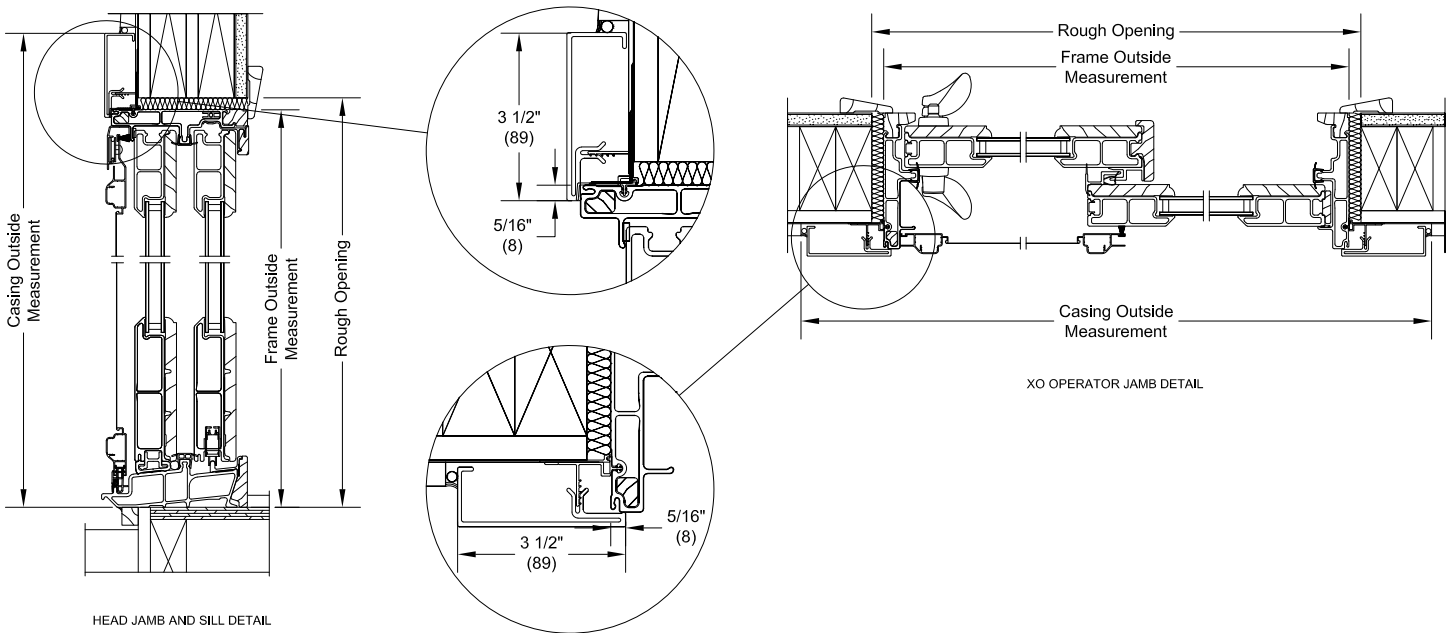

The 5/16" measurement shown is for Wood-Ultrex. The dimension for All Ultrex is 5/32".