


SWINGING TRANSOM UNITS

In-Sash Transom

MO (mm)	1'-6" (457)	2'-0" (610)	2'-6" (762)	3'-0" (914)	3'-6" (1067)	4'-0" (1219)	5'-0" (1524)	6'-0" (1829)
RO (mm)	1'-6" (457)	2'-0" (610)	2'-6" (762)	3'-0" (914)	3'-6" (1067)	4'-0" (1219)	5'-0" (1524)	6'-0" (1829)
FS (mm)	1'-5 1/2" (445)	1'-11 1/2" (597)	2'-5 1/2" (749)	2'-11 1/2" (902)	3'-5 1/2" (1054)	3'-11 1/2" (1207)	4'-11 1/2" (1511)	5'-11 1/2" (1816)
DLO (mm)	1153/64" (300)	1753/64" (453)	2353/64" (605)	2953/64" (757)	3553/64" (910)	4153/64" (1062)	5353/64" (1367)	6553/64" (1672)

0'-11 3/4" (298)								
1'-0" (305)								
1'-5 3/4" (451)								
1'-6" (457)								
1'-11 1/2" (292)								
1'-5 1/2" (445)								
1'-11 1/2" (597)								
1753/64" (300)								
1153/64" (453)								
1'-11 3/4" (603)								
2'-0" (610)								
1'-11 1/2" (597)								
1753/64" (453)								

Construction Details

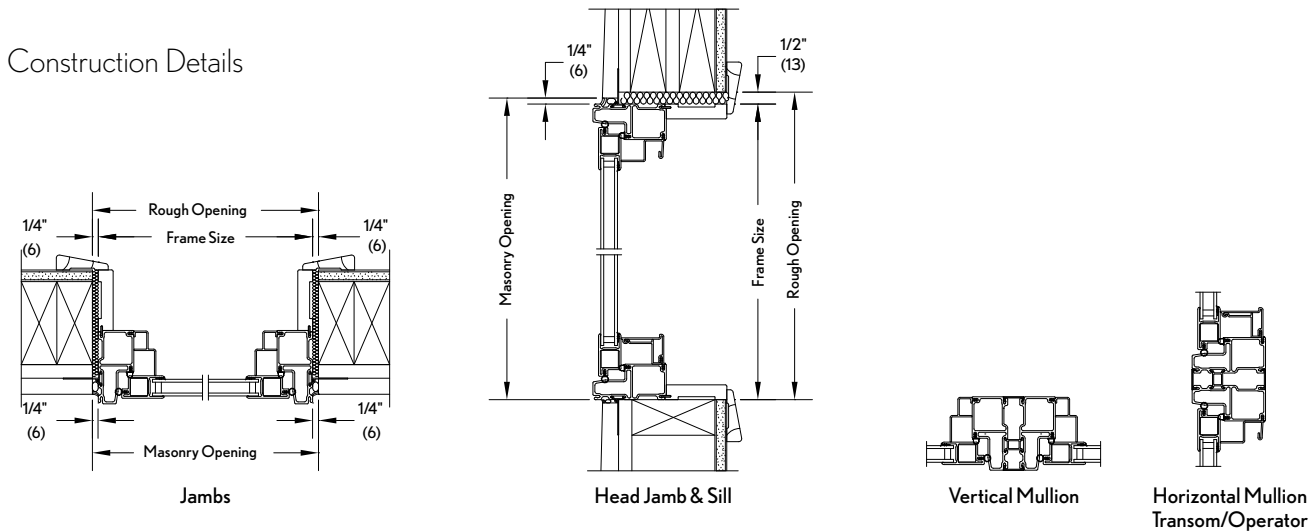

Multiple Assemblies

Multiple assemblies can be factory mullied.

MAXIMUM ROUGH OPENING not to exceed 114" X 78". Maximum up to 6 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 96" X 96". Maximum up to 5 units wide by 5 units high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity® from Marvin® representative for more information.