


SWINGING TRANSOM UNITS

In-Sash Transom

MO (mm)	1' - 6" (457)	2' - 0" (610)	2' - 6" (762)	3' - 0" (914)	3' - 6" (1067)	4' - 0" (1219)	5' - 0" (1524)	6' - 0" (1829)
RO (mm)	1' - 6" (457)	2' - 0" (610)	2' - 6" (762)	3' - 0" (914)	3' - 6" (1067)	4' - 0" (1219)	5' - 0" (1524)	6' - 0" (1829)
FS (mm)	1' - 5 1/2" (445)	1' - 11 1/2" (597)	2' - 5 1/2" (749)	2' - 11 1/2" (902)	3' - 5 1/2" (1054)	3' - 11 1/2" (1207)	4' - 11 1/2" (1511)	5' - 11 1/2" (1816)
DLO (mm)	11 53/64" (300)	17 53/64" (453)	23 53/64" (605)	29 53/64" (757)	35 53/64" (910)	41 53/64" (1062)	53 53/64" (1367)	65 53/64" (1672)

0' - 11 3/4" (298)								
1' - 0" (305)								
1' - 5 3/4" (451)								
1' - 6" (457)								
1' - 11 1/2" (292)								
1' - 5 1/2" (445)								
1' - 11 1/2" (597)								
17 53/64" (300)								
11 53/64" (453)								
1' - 11 3/4" (603)								
2' - 0" (610)								
17 53/64" (453)								

Construction Details

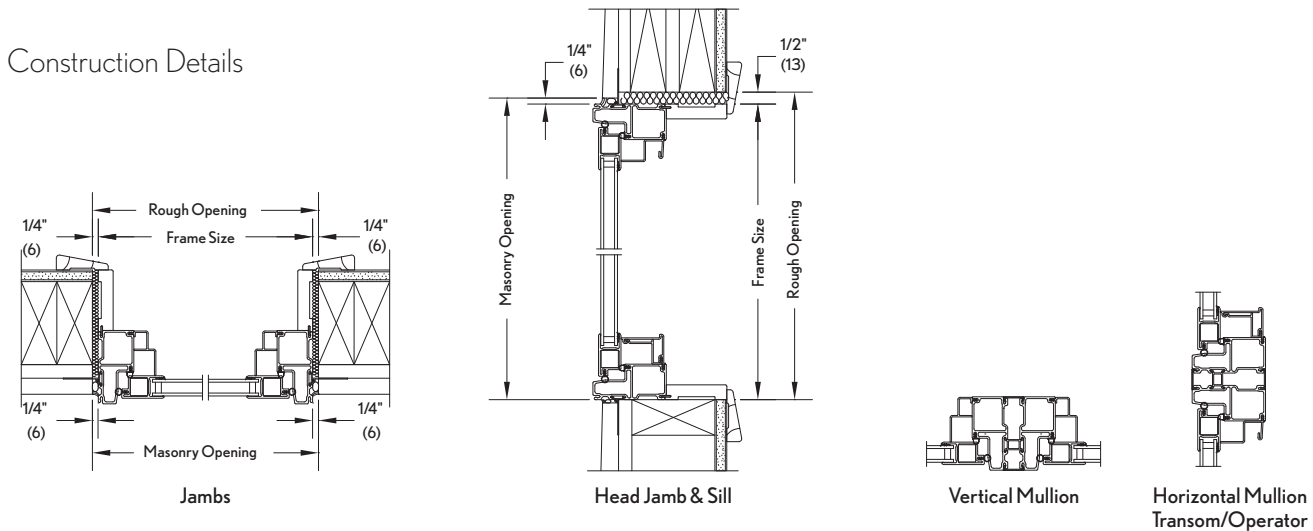

Multiple Assemblies

Multiple assemblies can be factory mullied.

MAXIMUM ROUGH OPENING not to exceed 114" X 78". Maximum up to 6 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 96" X 96". Maximum up to 5 units wide by 5 units high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity® from Marvin® representative for more information.