







# INSWING FRENCH DOOR

## Multiple Assemblies - 3 Panel

<b>MO (mm)</b>	7-5 13/16 (2281)	7-5 13/16 (2281)	7-7 7/16 (2323)	7-5 13/16 (2281)
<b>RO (mm)</b>	7-6 5/16 (2294)	7-6 5/16 (2294)	7-7 15/16 (2335)	7-6 5/16 (2294)
<b>FS (mm)</b>	7-5 5/16 (2269)	7-5 5/16 (2269)	7-6 15/16 (2310)	7-5 5/16 (2269)


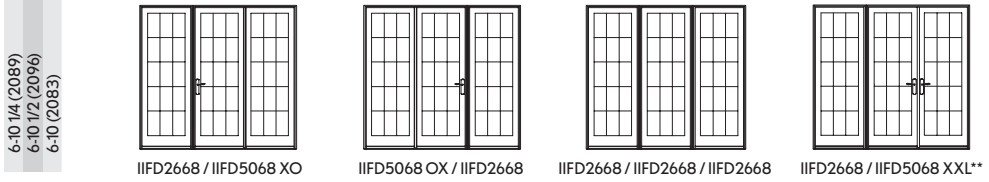


<b>MO (mm)</b>	8-11 13/16 (2738)	8-11 13/16 (2738)	9-1 7/16 (2780)	8-11 13/16 (2738)
<b>RO (mm)</b>	9-0 5/16 (2751)	9-0 5/16 (2751)	9-1 15/16 (2792)	9-0 5/16 (2751)
<b>FS (mm)</b>	8-11 5/16 (2726)	8-11 5/16 (2726)	9-0 15/16 (2767)	8-11 5/16 (2726)

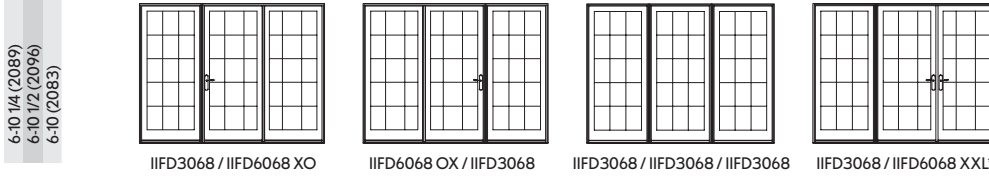

## Round Top Over Inswing French Door


<b>MO (mm)</b>	5-11 1/2 (1816)
<b>RO (mm)</b>	6-0 (1829)
<b>FS (mm)</b>	5-11 (1803)




IRT7236 DR\* / IIFD6068 XXL

## Direct Glaze Transom Over Inswing French Door


<b>MO (mm)</b>	3-0 13/16 (935)	3-0 13/16 (935)	5-11 1/2 (1816)
<b>RO (mm)</b>	3-1 5/16 (948)	3-1 5/16 (948)	6-0 (1829)
<b>FS (mm)</b>	3-0 5/16 (923)	3-0 5/16 (923)	5-11 (1803)

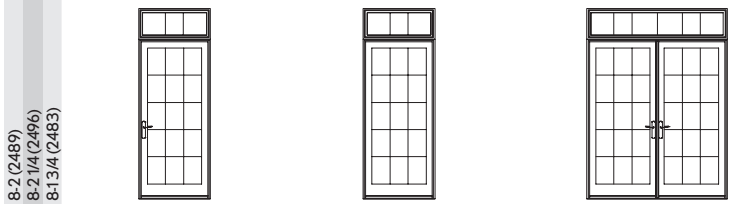


## Construction Details




Head Jamb and Sill with Sliding Screen



Head Jamb and Sill with Swinging Screen



Direct Glaze Transom Over Inswing French Door



Vertical Mullion O-XO operator

Details and Elevations not to scale.

\* This product is only available field mullied.

\*\* 2 and 3 panel XX configurations also available in XX R.

O = Stationary X = Operator


Optional Round Top SDL/Grilles and SDL with Spacer Bar are available in a standard cut, as shown. Round Top GBG cuts are shown on page 3. (Round Top divided lites only available in standard lite cut.)

## MULTIPLE ASSEMBLIES


Multiple assembly units can be factory mullied up to 3 units wide by 1 unit high, Maximum Rough Opening not to exceed 109 15/16" x 96"; or 2 units wide by 2 units high, Maximum Rough Opening not to exceed 73 5/8" x 100 1/2".

Field mull kits available for up to 3 units wide by 2 units high not to exceed 110" x 112". True Half Round transoms are available field mullied only. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity® from Marvin® representative for more information.

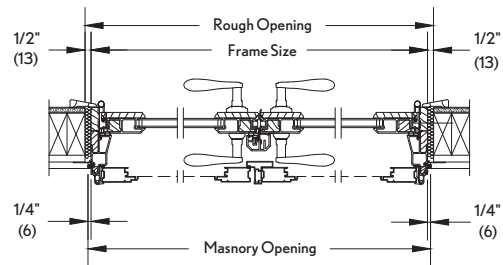

Jamb - XX Operator

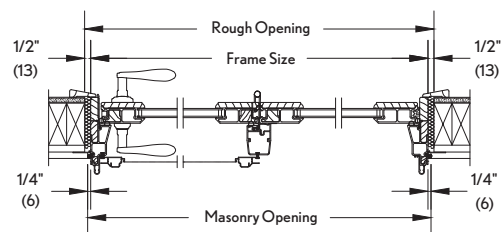

Jamb - XO Operator