



OUTSWING FRENCH DOOR

Multiple Assemblies - 3 Panel

MO (mm)	7-7 7/16 (2323)	7-7 7/16 (2323)	7-7 7/16 (2323)	7-5 13/16 (2281)
RO (mm)	7-7 15/16 (2335)	7-7 15/16 (2335)	7-7 15/16 (2335)	7-6 5/16 (2294)
Frame Size (mm)	7-6 15/16 (2310)	7-6 15/16 (2310)	7-6 15/16 (2310)	7-5 5/16 (2269)

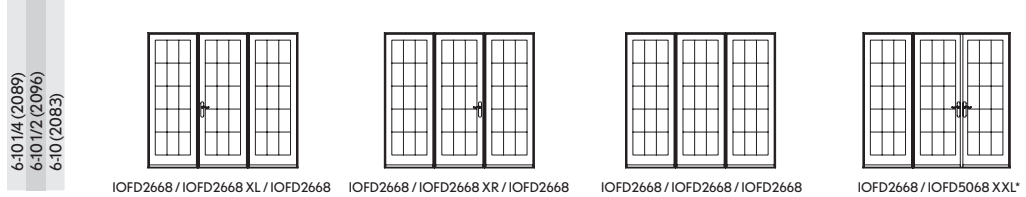


MO (mm)	9-1 7/16 (2780)	9-1 7/16 (2780)	9-1 7/16 (2780)	8-11 13/16 (2738)
RO (mm)	9-1 15/16 (2792)	9-1 15/16 (2792)	9-1 15/16 (2792)	9-0 5/16 (2751)
FS (mm)	9-0 15/16 (2767)	9-0 15/16 (2767)	9-0 15/16 (2767)	8-11 5/16 (2726)

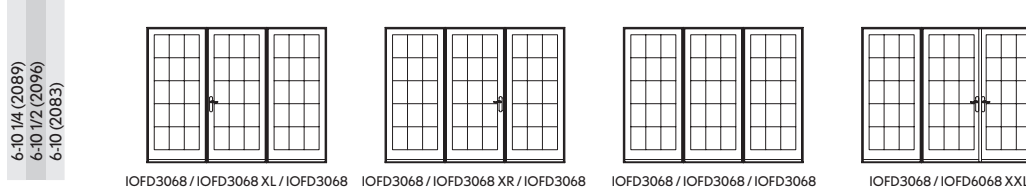



Direct Glaze Transom Over Outswing French Door

MO (mm)	3-0 13/16 (935)	3-0 13/16 (935)	5-11 1/2 (1816)
RO (mm)	3-1 5/16 (948)	3-1 5/16 (948)	6-0 (1829)
FS (mm)	3-0 5/16 (923)	3-0 5/16 (923)	5-11 (1803)

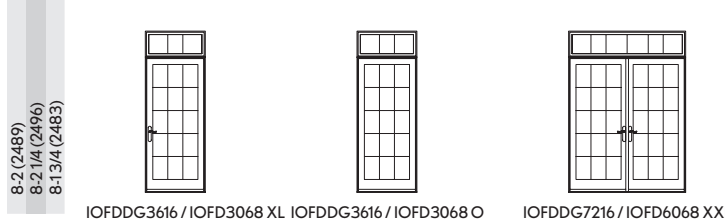

Round Top Over Outswing French Door

MO (mm)	5-11 1/2 (1816)
RO (mm)	6-0 (1829)
FS (mm)	5-11 (1803)



MULTIPLE ASSEMBLIES

Multiple assembly units can be factory mulled up to 3 units wide by 1 unit high.

Maximum Rough Opening not to exceed 109 15/16" x 96"; or 2 units wide by 2 units high, maximum Rough Opening not to exceed 73 5/8" x 100 1/2".

Field mull kits available for up to 3 units wide by 2 units high not to exceed 110" x 112". True Half Round transoms are available field mulled only. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity from Marvin representative for more information.

Details and Elevations not to scale.

O = Stationary X = Operator
L = Left Hand Panel R = Right Hand Panel

* 2 and 3 panel XX configurations also available in XX R.

** This product is only available field mulled.

Transom units have a 2" jamb extension for 6 9/16" jambs or a 2 1/4" jamb extension for 6 13/16" jambs. When ordering 6 9/16" or 6 13/16" jambs, add 1/4" to width and 1/8" to height of Frame Size (FS), Rough Opening (RO), or Masonry Opening (MO).

Optional Direct Glaze transom Grilles, GBGs, SDLs and SDLs with Spacer Bar are available in a standard Rectangular cut, as shown. Alternate transom lite cuts available to align with select lite cut options shown on page 3.

Optional Round Top SDL/Grilles and SDL with Spacer Bar are available in a standard cut, as shown. Round Top GBG cuts are shown on page 35 (Round Top divided lites only available in standard lite cut).