



OUTSWING FRENCH DOOR

Multiple Assemblies - 3 Panel

| | | | | |
|------------------------|------------------|------------------|------------------|------------------|
| MO (mm) | 7-7 7/16 (2323) | 7-7 7/16 (2323) | 7-7 7/16 (2323) | 7-5 13/16 (2281) |
| RO (mm) | 7-7 15/16 (2335) | 7-7 15/16 (2335) | 7-7 15/16 (2335) | 7-6 5/16 (2294) |
| Frame Size (mm) | 7-6 15/16 (2310) | 7-6 15/16 (2310) | 7-6 15/16 (2310) | 7-5 5/16 (2269) |

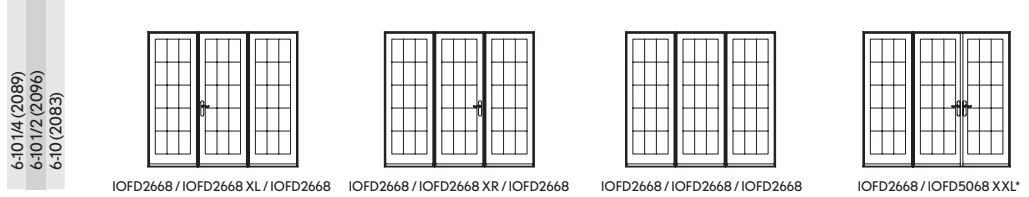


| | | | | |
|----------------|------------------|------------------|------------------|-------------------|
| MO (mm) | 9-1 7/16 (2780) | 9-1 7/16 (2780) | 9-1 7/16 (2780) | 8-11 13/16 (2738) |
| RO (mm) | 9-1 15/16 (2792) | 9-1 15/16 (2792) | 9-1 15/16 (2792) | 9-0 5/16 (2751) |
| FS (mm) | 9-0 15/16 (2767) | 9-0 15/16 (2767) | 9-0 15/16 (2767) | 8-11 5/16 (2726) |

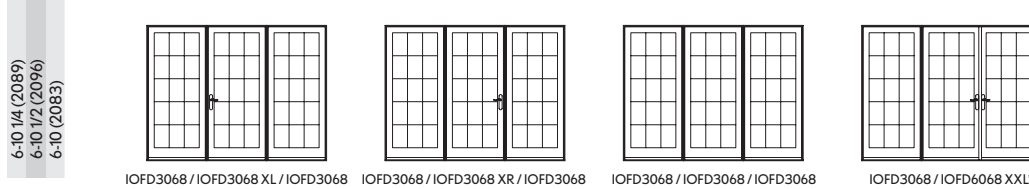



Direct Glaze Transom Over Outswing French Door

| | | | |
|----------------|-----------------|-----------------|-----------------|
| MO (mm) | 3-0 13/16 (935) | 3-0 13/16 (935) | 5-11 1/2 (1816) |
| RO (mm) | 3-1 5/16 (948) | 3-1 5/16 (948) | 6-0 (1829) |
| FS (mm) | 3-0 5/16 (923) | 3-0 5/16 (923) | 5-11 (1803) |

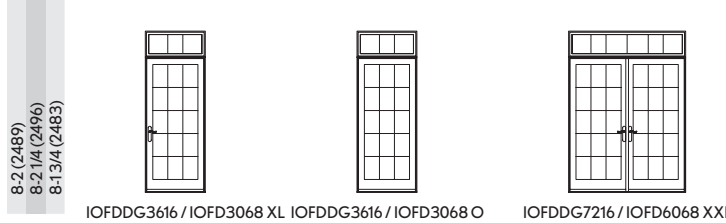

Round Top Over Outswing French Door

| | |
|----------------|-----------------|
| MO (mm) | 5-11 1/2 (1816) |
| RO (mm) | 6-0 (1829) |
| FS (mm) | 5-11 (1803) |

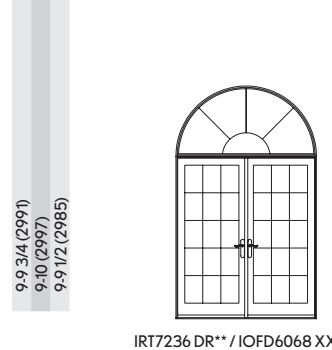

MULTIPLE ASSEMBLIES

MAXIMUM ROUGH OPENING not to exceed 109 15/16" x 96" maximum up to 3 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 73 5/8" x 100 1/2" maximum up to 2 units wide by 2 unit high.

Field mull kits available not to exceed 110" x 112". True Half Round transoms are available field mullied only. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity® from Marvin® representative for more information.

Details and Elevations not to scale.

O = Stationary X = Operator
L = Left Hand Panel R = Right Hand Panel

* 2 and 3 panel XX configurations also available in XX R.

** This product is only available field mullied.

Transom units have a 2" jamb extension for 6 9/16" jamba or a 2 1/4" jamb extension for 6 13/16" jamba. When ordering 6 9/16" or 6 13/16" jamba, add 1/4" to width and 1/8" to height of Frame Size (FS), Rough Opening (RO), or Masonry Opening (MO).

Optional Direct Glaze transom Grilles, GBGs, SDLs and SDLs with Spacer Bar are available in a standard Rectangular cut, as shown. Alternate transom lite cuts available to align with select lite cut options shown on page 3.

Optional Round Top SDL/Grilles and SDL with Spacer Bar are available in a standard cut, as shown. Round Top GBG cuts are shown on page 35. (Round Top divided lites only available in standard lite cut).