

Marvin Lock Status Sensor Door Display Installation Instructions

1. Remove plate on door panel. See Figure 1.



Figure 1

2. Place a charged battery in receiver on door plate. See Figure 2.



Figure 2

3. Reattach plate to door.



Figure 3

4. Attach receiver to Lock Status Sensor (LSS) plate. See Figure 4.

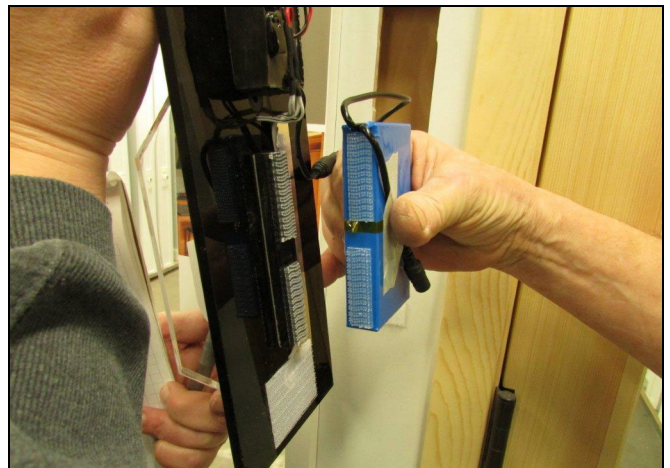


Figure 4

5. Connect receiver cords. Turn receiver to on position. See Figure 4.



Figure 5

6. Remove backing on hook and loop fastener. Center LSS Plate and attach to Display wall. Ensure all cords are contained within wall opening/ See Figure 6.



Figure 6

7. Unit has a three minute timer. Cycle unit once before using. See Figure 7.



Figure 7