DO NOT REMOVE!

Finishing the Retractable Screen

Prior to finishing: If you ordered your screen loose, install the cardboard finishing inserts on either side of the pull bar. If the screen is factory installed, remove one cardboard piece and insert it behind the pull bar so both sides of the screen mesh are covered.

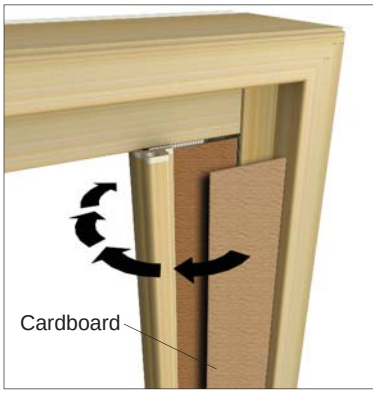

STAINING: Apply finish according to the manufacturer's instructions with additional coats of finish applied until the desired color is achieved. Care should be taken to keep the finish from contacting non-wood parts. If applying stain, apply at least two coats of sealer.

CAUTION: When applying a finish, it is imperative the finish does NOT come in contact with weather strip, vinyl, plastic, mesh or any other non-wood parts. Solvents in paints, stains and varnishes will cause plastic or vinyl parts, in particular, to become brittle and require replacement.

NOTE: To minimize chances of screen roll contamination, DO NOT use a spray to finish your screen.

Once dry, follow the provided Retractable Screen installation instruction for installation or removal of the Retractable Screen.

19972202
2010-01-11