

Double Hung Sash Lift Accessory Installation Instructions



Standard Parts Shipped

Sash Lift
2- #8 x 1" slotted oval head wood screws

You Will Need to Supply


Pencil and tape
Awl or marker point
Drill and 3/32" drill bit
Straight blade screwdriver.

ATTENTION: Specifications and technical data are subject to change without notice. **This part is not compatible with units that have a retractable screen or interior shade.**

Installation Procedures

1. Determine desired center(s) of sash lift across bottom rail. Mark location near top of flat face with tape and pencil.
2. Cut out template and position on the bottom rail, aligning along top edge of rail face. Mark screw with an awl or pencil. (For square cope units place template 1/4" below cope edge.)
3. Drill pilot holes at screw locations with a 3/32" drill bit 3/4" - 1" (22-25) deep.
4. Position handle on rail, attach with screws using a straight blade screwdriver. Remove tape and pencil marks used to locate template.

11708569 - Truth #92194
2017-10-05

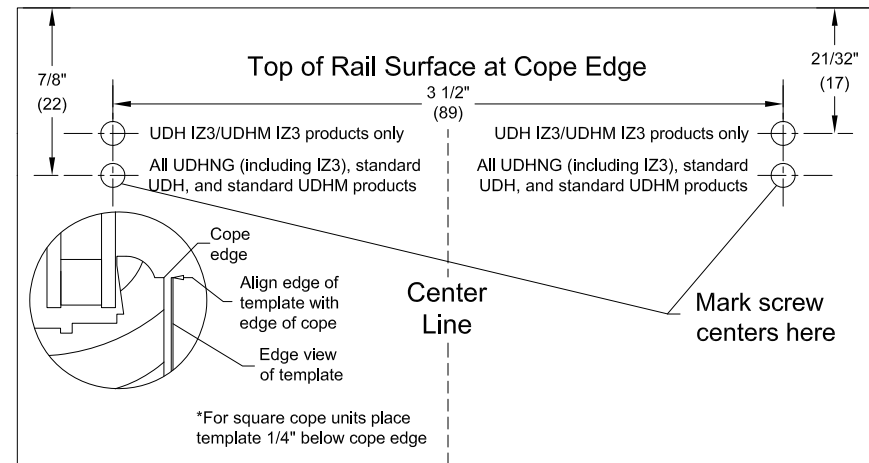

Double Hung Sash Lift Accessory Installation Instructions



Standard Parts Shipped

Sash Lift
2- #8 x 1" slotted oval head wood screws

You Will Need to Supply


Pencil and tape
Awl or marker point
Drill and 3/32" drill bit
Straight blade screwdriver.

ATTENTION: Specifications and technical data are subject to change without notice. **This part is not compatible with units that have a retractable screen or interior shade.**

Installation Procedures

1. Determine desired center(s) of sash lift across bottom rail. Mark location near top of flat face with tape and pencil.
2. Cut out template and position on the bottom rail, aligning along top edge of rail face. Mark screw with an awl or pencil. (For square cope units place template 1/4" below cope edge.)
3. Drill pilot holes at screw locations with a 3/32" drill bit 3/4" - 1" (22-25) deep.
4. Position handle on rail, attach with screws using a straight blade screwdriver. Remove tape and pencil marks used to locate template.

11708569 - Truth #92194
2017-10-05

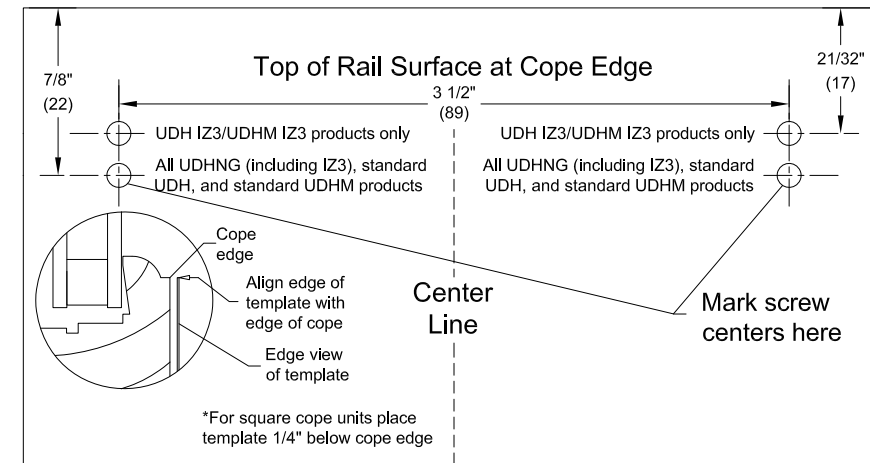

Double Hung Sash Lift Accessory Installation Instructions



Standard Parts Shipped

Sash Lift
2- #8 x 1" slotted oval head wood screws

You Will Need to Supply


Pencil and tape
Awl or marker point
Drill and 3/32" drill bit
Straight blade screwdriver.

ATTENTION: Specifications and technical data are subject to change without notice. **This part is not compatible with units that have a retractable screen or interior shade.**

Installation Procedures

1. Determine desired center(s) of sash lift across bottom rail. Mark location near top of flat face with tape and pencil.
2. Cut out template and position on the bottom rail, aligning along top edge of rail face. Mark screw with an awl or pencil. (For square cope units place template 1/4" below cope edge.)
3. Drill pilot holes at screw locations with a 3/32" drill bit 3/4" - 1" (22-25) deep.
4. Position handle on rail, attach with screws using a straight blade screwdriver. Remove tape and pencil marks used to locate template.

11708569 - Truth #92194
2017-10-05

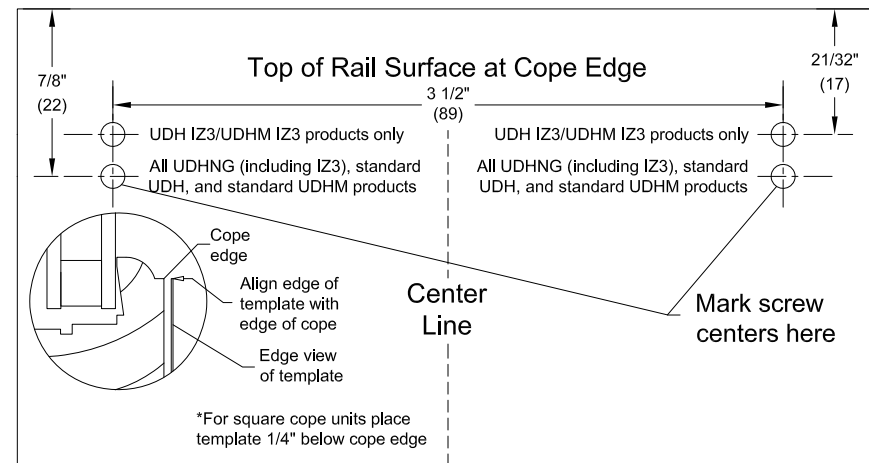

Double Hung Sash Lift Accessory Installation Instructions



Standard Parts Shipped

Sash Lift
2- #8 x 1" slotted oval head wood screws

You Will Need to Supply

Pencil and tape
Awl or marker point
Drill and 3/32" drill bit
Straight blade screwdriver.

ATTENTION: Specifications and technical data are subject to change without notice. **This part is not compatible with units that have a retractable screen or interior shade.**

Installation Procedures

1. Determine desired center(s) of sash lift across bottom rail. Mark location near top of flat face with tape and pencil.
2. Cut out template and position on the bottom rail, aligning along top edge of rail face. Mark screw with an awl or pencil. (For square cope units place template 1/4" below cope edge.)
3. Drill pilot holes at screw locations with a 3/32" drill bit 3/4" - 1" (22-25) deep.
4. Position handle on rail, attach with screws using a straight blade screwdriver. Remove tape and pencil marks used to locate template.

11708569 - Truth #92194
2017-10-05

