

# Ultimate Glider Fixed Sash Limiter Field Applied Instruction

**Installer:** Leave this information for the current or future occupant.

**ABSTRACT:** Use this product on wood or clad Ultimate Gliders. The purpose of the fixed sash limiter is to restrict the sash travel on the Ultimate Glider. These instructions are a supplement to the installation instructions included with the window.

**NOTE:** Numbers listed in parentheses are metric equivalents in millimeters rounded to the nearest whole number.

## IMPORTANT

This fixed sash limiter does **not** satisfy the requirement of ASTM- F2090-10 as a window opening control device. Factory installed fixed sash limiter is set at a 4"(102) (actual 3 3/4"(95) ) net clear opening.

**NOTE:** The fixed sash limiter for an Ultimate Glider will not meet egress. Sash limiters are available for XO, OX, and XOX configurations. Sash and screen removal will require removal of the limiter.

### Standard Kit Includes:

Fixed sash limiter device	
Instruction	Screws

### You Will Need to Supply

Safety glasses	Screwdriver
----------------	-------------

1. Determine the desired opening of glider sash. See figure 1.



Figure 1

2. Mark the head jamb with the desired opening for the sash. See figure 2.

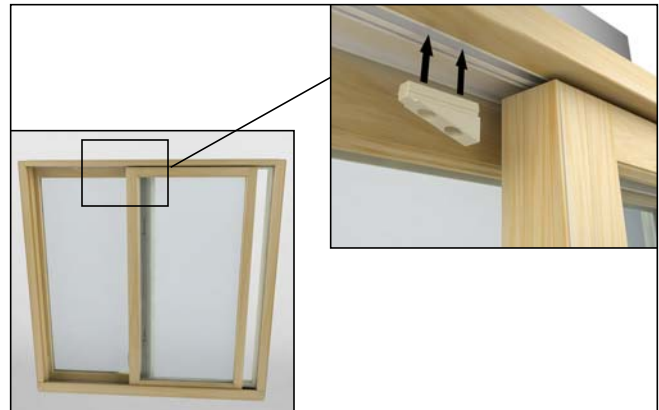


Figure 2

3. Using screws provided in kit, install sash limiter to head jamb. See figure 3.



Figure 3

4. When the sash is opened, the stile of the operating sash will strike the limiter, restricting travel. See figure 4.

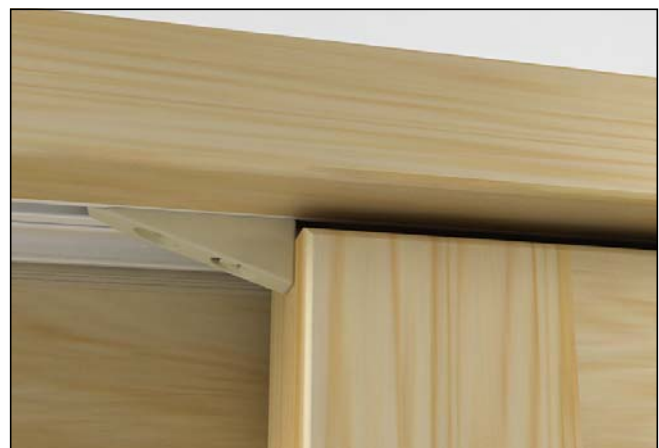


Figure 4