

Double Hung - Transoms and Multiple Assemblies


Transom Mullered Over Double Hung

MO (mm)	2' - 6" (762)
RO (mm)	2' - 6" (762)
FS (mm)	2' - 5 1/2" (749)




Transom Mullered Over Double Hung 2 Wide

MO (mm)	5' - 0" (1524)
RO (mm)	5' - 0" (1524)
FS (mm)	4' - 11 1/2" (1511)

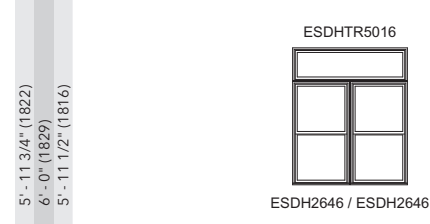


Double Hung Flankers with Center Picture*

MO (mm)	10' - 0" (3048)
RO (mm)	10' - 0" (3048)
FS (mm)	9' - 11 1/2" (3035)

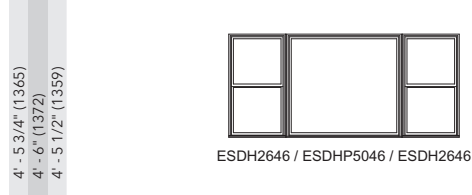


Double Hung Flankers with Center Operator


MO (mm)	7' - 6" (2286)
RO (mm)	7' - 6" (2286)
FS (mm)	7' - 5 1/2" (2273)

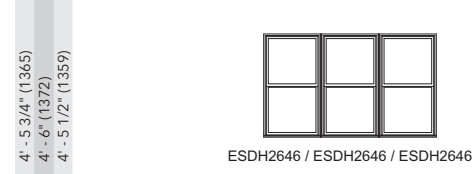


Construction Details

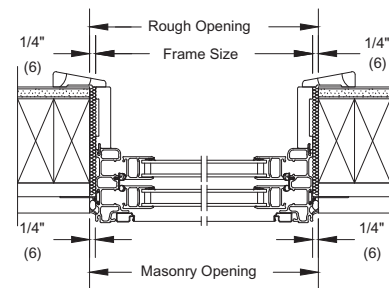

Jambs

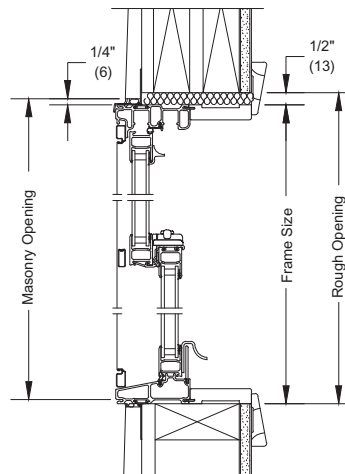

Head Jamb & Sill



Vertical Mull
Double Hung To Single Hung



Horizontal Mull
Picture/Transom To Double Hung

* This product is only available field mullered.

Details and Elevations not to scale.

Available in equal, cottage, and reverse cottage sash configurations. Cottage and reverse cottage sash configurations are not available on 20, 60, and 66 call number heights.

Special sized units available within product size matrix. See your Marvin retailer.

Units may optionally include a window opening control device tested to ASTM F2090-10, which can be released from the inside without the use of a key, tool, special knowledge, or force greater than that required for normal unit operation.

See page 58 for specific PG Ratings.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

MULLED ASSEMBLIES

Mulling can be factory mullered.

MAXIMUM ROUGH OPENING not to exceed 114" x 78". Maximum up to 6 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 60" x 96". Maximum up to 1 unit wide by 5 units high.

For Multi-Wide Multi-High assemblies, **MAXIMUM ROUGH OPENING** not to exceed 96" x 96". Maximum up to 5 units wide by 5 units high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.