







Sliding French Door G2




Retro Width and Retro Height

MO (mm)	2-9 9/16 (852)	3-3 9/16 (1005)	4-3 9/16 (1310)	4-11 1/2 (1511)	5-11 1/2 (1816)	7-11 1/2 (2426)
RO (mm)	2-10 1/16 (865)	3-4 1/16 (1017)	4-4 1/16 (1322)	5-0 (1524)	6-0 (1829)	8-0 (2438)
FS (mm)	2-9 1/16 (840)	3-3 1/16 (992)	4-3 1/16 (1297)	4-11 (1499)	5-11 (1803)	7-11 (2413)
DLO (mm)	1-9 7/32 (539)	2-3 7/32 (691)	3-3 7/32 (996)	1-9 13/64 (539)	2-3 13/64 (691)	3-3 13/64 (996)

6-7 3/4 (2026) 6-8 (2032) 6-7 1/2 (2019) 5-3 47/64 (1619)						
	USFDG2 26R66R	USFDG2 30R66R	USFDG2 40R66R	USFDG2 50R66R	USFDG2 60R66R	USFDG2 80R66R

Retro Width and Retro Height

MO (mm)	7-6 19/64 (2294)	9-0 19/64 (2751)	12-0 19/64 (3665)
RO (mm)	7-6 51/64 (2306)	9-0 51/64 (2764)	12-0 51/64 (3678)
FS (mm)	7-5 51/64 (2281)	8-11 51/64 (2738)	11-11 51/64 (3653)
DLO (mm)	1-9 13/64 (539)	2-3 13/64 (691)	3-3 13/64 (996)

6-7 3/4 (2026) 6-8 (2032) 6-7 1/2 (2019) 5-3 47/64 (1619)			
	USFDG2 76R66R	USFDG2 90R66R	USFDG2 120R66R

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.

Please consult your local Marvin representative for masonry openings that include casings and subsills.

















For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

ULTIMATE OUTSWING FRENCH DOOR G2: UOFDG2
ULTIMATE OUTSWING FRENCH DOOR 2 1/4" G2: UOFD225G2

Sliding French Door G2

1 Panel With

MO (mm)	2-10 3/8 (873)	3-4 3/8 (1025)	4-4 3/8 (1330)	5-4 3/8 (1635)	4-11 1/2 (1511)	5-1 1/8 (1553)
RO (mm)	2-10 7/8 (886)	3-4 7/8 (1038)	4-4 7/8 (1343)	5-4 7/8 (1648)	5-0 (1524)	5-1 5/8 (1565)
FS (mm)	2-9 7/8 (860)	3-3 7/8 (1013)	4-3 7/8 (1317)	5-3 7/8 (1622)	4-11 (1499)	5-0 5/8 (1540)
DLO (mm)	1-10 1/32 (559)	2-4 1/32 (712)	3-4 1/32 (1017)	4-4 1/32 (1321)	1-9 13/64 (539)	1-10 1/64 (559)

6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083) 5-6 15/64 (1682)	 USFDG2 2668 USFD2.25G2 2668	 USFDG2 3068 USFD2.25G2 3068	 USFDG2 4068 USFD2.25G2 4068	 USFD2.25G2 5068	 USFDG2 50R68	 USFDG2 5068 USFD2.25G2 5068
7-2 1/4 (2191) 7-2 1/2 (2197) 7-2 (2184) 5-10 15/64 (1784)	 USFDG2 2670 USFD2.25G2 2670	 USFDG2 3070 USFD2.25G2 3070	 USFDG2 4070 USFD2.25G2 4070	 USFD2.25G2 5070		 USFDG2 5070 USFD2.25G2 5070
8-2 1/4 (2496) 8-2 1/2 (2502) 8-2 (2489) 6-10 15/64 (2089)	 USFDG2 2680 USFD2.25G2 2680	 USFDG2 3080 USFD2.25G2 3080	 USFDG2 4080 USFD2.25G2 4080	 USFD2.25G2 5080		 USFDG2 5080 USFD2.25G2 5080
9-2 1/4 (2800) 9-2 1/2 (2807) 9-2 (2794) 7-10 15/64 (2394)	 USFD2.25G2 2690	 USFD2.25G2 3090	 USFD2.25G2 4090	 USFD2.25G2 5090		 USFD2.25G2 5090
10-2 1/4 (3105) 10-2 1/2 (3112) 10-2 (3099) 8-10 15/64 (2698)	 USFD2.25G2 26100	 USFD2.25G2 30100	 USFD2.25G2 40100	 USFD2.25G2 50100		 USFD2.25G2 50100

R = Retro Size USFD2.25G2 26100

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.


















Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Sliding French Door G2

2 Panel Width

MO (mm)	5-11 1/2 (1816)	6-1 1/8 (1857)	7-11 1/2 (2426)	8-1 1/8 (2467)	10-1 1/8 (3077)
RO (mm)	6-0 (1829)	6-1 5/8 (1870)	8-0 (2438)	8-1 5/8 (2480)	10-1 5/8 (3089)
FS (mm)	5-11 (1803)	6-0 5/8 (1845)	7-11 (2413)	8-0 5/8 (2454)	10-0 5/8 (3064)
DLO (mm)	2-3 13/64 (691)	2-4 1/64 (712)	3-3 13/64 (996)	3-4 1/64 (1017)	4-4 1/64 (1321)

6-10 1/4 (2089)					
6-10 1/2 (2096)					
6-10 (2083)					
5-6 15/64 (1682)					
7-2 1/4 (2191)					
7-2 1/2 (2197)					
7-2 (2184)					
5-10 15/64 (1784)					
8-2 1/4 (2496)					
8-2 1/2 (2502)					
8-2 (2489)					
6-10 15/64 (2089)					
9-2 1/4 (2800)					
9-2 1/2 (2807)					
9-2 (2794)					
7-10 15/64 (2394)					
10-2 1/4 (3105)					
10-2 1/2 (3112)					
10-2 (3099)					
8-10 15/64 (2698)					

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.













Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Sliding French Door G2

3 Panel With

MO (mm)	7-6 19/64 (2294)	7-8 47/64 (2356)	9-0 19/64 (2751)	9-2 47/64 (2813)
RO (mm)	7-6 51/64 (2306)	7-9 15/64 (2368)	9-0 51/64 (2764)	9-3 15/64 (2826)
FS (mm)	7-5 51/64 (2281)	7-8 15/64 (2343)	8-11 51/64 (2738)	9-2 15/64 (2800)
DLO (mm)	1-9 13/64 (539)	1-10 1/64 (559)	2-3 13/64 (691)	2-4 1/64 (712)

6-10 1/4 (2089)				
6-10 1/2 (2096)	USFDG2 76R68	USFDG2 7668 USFD2.25G2 7668	USFDG2 90R68	USFDG2 9068 USFD2.25G2 9068
6-10 (2083)	5-6 15/64 (1682)			
7-2 1/4 (2191)				
7-2 1/2 (2197)		USFDG2 7670 USFD2.25G2 7670		USFDG2 9070 USFD2.25G2 9070
7-2 (2184)	5-10 15/64 (1784)			
8-2 1/4 (2496)				
8-2 1/2 (2502)		USFDG2 7680 USFD2.25G2 7680		USFDG2 9080 USFD2.25G2 9080
8-2 (2489)	6-10 15/64 (2089)			
9-2 1/4 (2800)				
9-2 1/2 (2807)		USFD2.25G2 7690		USFD2.25G2 9090
9-2 (2794)	7-10 15/64 (2394)			
10-2 1/4 (3105)				
10-2 1/2 (3112)		USFD2.25G2 76100		USFD2.25G2 90100
10-2 (3099)	8-10 15/64 (2698)			

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.



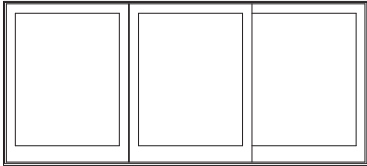


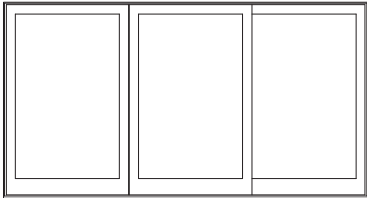

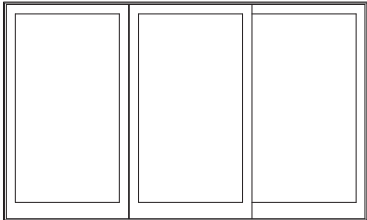

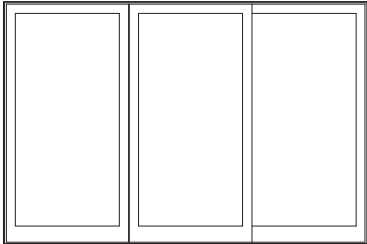
Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Sliding French Door G2

4 Panel Width

MO (mm)	12-0 19/64 (3665)	12-2 47/64 (3727)	15-2 47/64 (4642)
RO (mm)	12-0 51/64 (3678)	12-3 15/64 (3740)	15-3 15/64 (4654)
FS (mm)	11-11 51/64 (3653)	12-2 15/64 (3715)	15-2 15/64 (4629)
DLO (mm)	3-3 13/64 (996)	3-4 1/64 (1017)	4-4 1/64 (1321)

6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083) 5-6 15/64 (1682)			
	USFDG2 120R68	USFDG2 12068 USFD2.25G2 12068	USFD2.25G2 15068
7-2 1/4 (2191) 7-2 1/2 (2197) 7-2 (2184) 5-10 15/64 (1784)			
		USFDG2 12070 USFD2.25G2 12070	USFD2.25G2 15070
8-2 1/4 (2496) 8-2 1/2 (2502) 8-2 (2489) 6-10 15/64 (2089)			
		USFDG2 12080 USFD2.25G2 12080	USFD2.25G2 15080
9-2 1/4 (2800) 9-2 1/2 (2807) 9-2 (2794) 7-10 15/64 (2394)			
		USFD2.25G2 12090	USFD2.25G2 15090
10-2 1/4 (3105) 10-2 1/2 (3112) 10-2 (3099) 8-10 15/64 (2698)			
		USFD2.25G2 120100	USFD2.25G2 150100

R = Retro Size

- All glass is tempered.
- 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
- Doors above CN 8/0 height use 2 1/4" panels.
- Some configurations require KD.

Details and Elevations not to scale.

Please consult your local Marvin representative for additional mulling configurations.



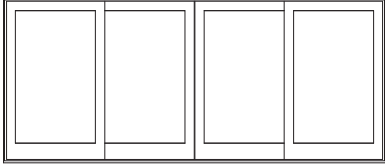



Please consult your local Marvin representative for masonry openings that include casings and subsills.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

Sliding French Door G2

4 Panel Width

MO (mm)	9-11 1/2 (3035)	11-11 1/2 (3645)	15-11 1/2 (4864)
RO (mm)	10-0 (3048)	12-0 (3658)	16-0 (4877)
FS (mm)	9-11 (3023)	11-11 (3632)	15-11 (4851)
DLO (mm)	1-10 1/64 (559)	2-4 1/64 (712)	3-4 1/64 (1017)

6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083) 5-6 15/64 (1682)	 USFDG2 10068 USFD2.25G2 10068	 USFDG2 12068 USFD2.25G2 12068	 USFDG2 16068 USFD2.25G2 16068
7-2 1/4 (2191) 7-2 1/2 (2197) 7-2 (2184) 5-10 15/64 (1784)	 USFDG2 10070 USFD2.25G2 10070	 USFDG2 12070 USFD2.25G2 12070	 USFDG2 16070 USFD2.25G2 16070
8-2 1/4 (2496) 8-2 1/2 (2502) 8-2 (2489) 6-10 15/64 (2089)	 USFDG2 10080 USFD2.25G2 10080	 USFDG2 12080 USFD2.25G2 12080	 USFDG2 16080 USFD2.25G2 16080
9-2 1/4 (2800) 9-2 1/2 (2807) 9-2 (2794) 7-10 15/64 (2394)	 USFD2.25G2 10090	 USFD2.25G2 12090	 USFD2.25G2 16090
10-2 1/4 (3105) 10-2 1/2 (3112) 10-2 (3099) 8-10 15/64 (2698)	 USFD2.25G2 100100	 USFD2.25G2 120100	 USFD2.25G2 160100

- R = Retro Size
- All glass is tempered.
 - 6 9/16" jambs required for Inswing French Door G2 and Inswing French Door 2 1/4" G2
 - Doors above CN 8/0 height use 2 1/4" panels.
 - Some configurations require KD.

Details and Elevations not to scale.
Please consult your local Marvin representative for additional mulling configurations.
Please consult your local Marvin representative for masonry openings that include casings and sills.
For further details and drawings visit the 'Technical Specifications' section at Marvin.com.