
















INSWING FRENCH DOOR

MO (mm)	2-6 13/16 (783)			2-8 13/16 (834)			3-0 13/16 (935)		
RO (mm)	2-7 5/16 (796)			2-9 5/16 (846)			3-1 5/16 (948)		
FS (mm)	2-6 5/16 (770)			2-8 5/16 (821)			3-0 5/16 (923)		
DLO (mm)	1-9 11/32 (542)			1-11 11/32 (593)			2-3 11/32 (695)		
6-7 3/4 (2026)									
6-8 (2032)									
6-7 1/2 (2019)									
5-7 3/32 (1704)									
6-10 1/4 (2089)									
6-10 1/2 (2096)									
6-10 (2083)									
5-9 19/32 (1768)									
7-2 1/4 (2191)									
7-2 1/2 (2197)									
7-2 (2184)									
6-1 19/32 (1869)									
7-11 3/4 (2432)									
8-0 (2438)									
7-11 1/2 (2426)									
6-11 3/32 (2111)									

Inswing Door Operation


X signifies an operating door panel, O means stationary.

Listing the panels in a door starts from the left to the right, looking from the exterior.


Details and Elevations not to scale.

O = Stationary X = Operator
L = Left Hand Panel R = Right Hand Panel

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.



OX L Inswing Door




XO R Inswing Door




X R Inswing Door



X L Inswing Door



XX R Inswing Door



XX L Inswing Door

MULTIPLE ASSEMBLIES

Multiple assemblies can be factory mullied.

MAXIMUM ROUGH OPENING not to exceed 109 15/16" x 96" maximum up to 3 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 73 5/8" x 100 1/2" maximum up to 2 units wide by 2 unit high.

































Field mull kits available for up to 3 units wide by 2 units high not to exceed 110" x 112".

True Half Rounds are available field mullied only. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.

MARVIN ELEVATE® COLLECTION

INSWING FRENCH DOOR

MO (mm)	4-11 1/2 (1511)		5-3 1/2 (1613)		5-11 1/2 (1816)	
RO (mm)	5-0 (1524)		5-4 (1626)		6-0 (1829)	
FS (mm)	4-11 (1499)		5-3 (1600)		5-11 (1803)	
DLO (mm)	1-9 11/32 (542)		1-11 11/32 (593)		2-3 11/32 (695)	
6-7 3/4 (2026)						
6-8 (2032)	ELIFD5065 XO	ELIFD5065 XX	ELIFD5465 XO	ELIFD5465 XX	ELIFD6065 XO	ELIFD6065 XX
6-7 1/2 (2019)						
5-7 3/32 (1704)	ELIFD5068 XO	ELIFD5068 XX	ELIFD5468 XO	ELIFD5468 XX	ELIFD6068 XO	ELIFD6068 XX
6-10 1/4 (2089)						
6-10 1/2 (2096)	ELIFD5070 XO	ELIFD5070 XX	ELIFD5470 XO	ELIFD5470 XX	ELIFD6070 XO	ELIFD6070 XX
6-10 (2083)						
5-9 19/32 (1768)	ELIFD5080 XO	ELIFD5080 XX	ELIFD5480 XO	ELIFD5480 XX	ELIFD6080 XO	ELIFD6080 XX
7-2 1/4 (2191)						
7-2 1/2 (2197)	ELIFD5070 XO	ELIFD5070 XX	ELIFD5470 XO	ELIFD5470 XX	ELIFD6070 XO	ELIFD6070 XX
7-2 (2184)						
6-1 19/32 (1869)	ELIFD5070 XO	ELIFD5070 XX	ELIFD5470 XO	ELIFD5470 XX	ELIFD6070 XO	ELIFD6070 XX
7-11 3/4 (2432)						
8-0 (2438)	ELIFD5080 XO	ELIFD5080 XX	ELIFD5480 XO	ELIFD5480 XX	ELIFD6080 XO	ELIFD6080 XX
7-11 1/2 (2426)						
6-11 3/32 (2111)	ELIFD5080 XO	ELIFD5080 XX	ELIFD5480 XO	ELIFD5480 XX	ELIFD6080 XO	ELIFD6080 XX

Details and Elevations not to scale.

* This product is only available field mulled.







O = Stationary X = Operator

Optional Direct Glaze GBGs, SDLs and SDLs with Spacer Bar are available in a standard rectangular cut, as shown. Alternate lite cuts available to align with doors using select lite cut options shown on page 3.



For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

INSWING FRENCH DOOR

Multiple Assemblies – 3 Panel

MO (mm)	7-5 13/16 (2281)	7-5 13/16 (2281)	7-7 7/16 (2323)	7-5 13/16 (2281)
RO (mm)	7-6 5/16 (2294)	7-6 5/16 (2294)	7-7 15/16 (2335)	7-6 5/16 (2294)
FS (mm)	7-5 5/16 (2269)	7-5 5/16 (2269)	7-6 15/16 (2310)	7-5 5/16 (2269)
6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083)				
	ELIFD2668 / ELIFD5068 XO	ELIFD5068 OX / ELIFD2668	ELIFD2668 / ELIFD2668 / ELIFD2668	ELIFD2668 / ELIFD5068 XXL**
MO (mm)	8-11 13/16 (2738)	8-11 13/16 (2738)	9-1 7/16 (2780)	8-11 13/16 (2738)
RO (mm)	9-0 5/16 (2751)	9-0 5/16 (2751)	9-1 15/16 (2792)	9-0 5/16 (2751)
FS (mm)	8-11 5/16 (2726)	8-11 5/16 (2726)	9-0 15/16 (2767)	8-11 5/16 (2726)
6-10 1/4 (2089) 6-10 1/2 (2096) 6-10 (2083)				
	ELIFD3068 / ELIFD6068 XO	ELIFD6068 OX / ELIFD3068	ELIFD3068 / ELIFD3068 / ELIFD3068	ELIFD3068 / ELIFD6068 XXL**

Round Top Over Inswing French Door

MO (mm)	5-11 1/2 (1816)
RO (mm)	6-0 (1829)
FS (mm)	5-11 (1803)
8-4 1/4 (2546) 8-4 1/2 (2553) 8-4 (2540)	
	ELDGRT7218 / ELIFD6068 XXL
9-9 3/4 (2991) 9-10 (2997) 9-9 1/2 (2985)	
	ELDGRT7236* / ELIFD6068 XXL

Details and Elevations not to scale.

* This product is only available field mullled.

** 2 and 3 panel XX configurations also available in XX R.

O = Stationary X = Operator

Optional Round Top SDL and SDL with Spacer Bar are available in a standard cut, as shown. Round Top GBG cuts are shown on page 3. (Round Top divided lites only available in standard lite cut) For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

MULTIPLE ASSEMBLIES

Multiple assemblies can be factory mullled.

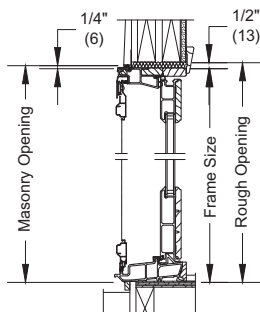
MAXIMUM ROUGH OPENING not to exceed 109 15/16" x 96" maximum up to 3 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 73 5/8" x 100 1/2" maximum up to 2 units wide by 2 unit high.


Field mull kits available not to exceed 110" x 112". True Half Rounds are available field mullled only. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.


Construction Details




Head Jamb and Sill
with Sliding Screen




Head Jamb and Sill
with Swinging Screen




Direct Glaze Over Inswing
French Door



Vertical Mullion
O-XO operator

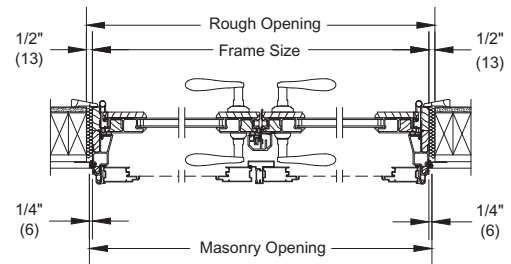

Jamb - XX Operator

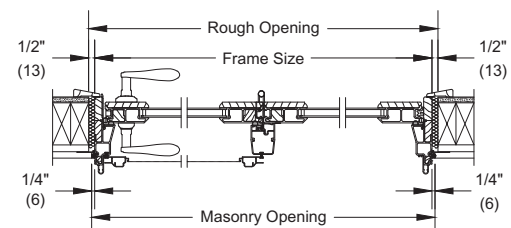

Jamb - XO Operator