



1 Wide and 2 Wide

MO (mm)	3-0 (914)	4-0 (1219)	5-0 (1524)	6-0 (1829)	5-11 1/2 (1816)	7-11 1/2 (2426)
RO (mm)	3-0 1/2 (927)	4-0 1/2 (1232)	5-0 1/2 (1537)	6-0 1/2 (1842)	6-0 (1829)	8-0 (2438)
FS (mm)	2-11 1/2 (902)	3-11 1/2 (1207)	4-11 1/2 (1511)	5-11 1/2 (1816)	5-11 (1803)	7-11 (2413)
DLO (mm)	1-1 11/16 (348)	1-7 11/16 (500)	2-1 11/16 (652)	2-7 11/16 (805)	1-1 11/16 (348)	1-7 11/16 (500)
2-0 (610) 2-0 1/4 (616) 1-11 3/4 (603) 1-5 3/4 (449)	 ELGL3624	 ELGL4824	 ELGL6024	 ELGL7224	 ELGL3624 2W	 ELGL4824 2W
3-0 (914) 3-0 1/4 (921) 2-11 3/4 (908) 2-5 3/4 (754)	 ELGL3636	 ELGL4836	 ELGL6036 E*	 ELGL7236 E*	 ELGL3636 2W	 ELGL4836 2W
3-6 (1067) 3-6 1/4 (1073) 3-5 3/4 (1060) 2-11 3/4 (906)	 ELGL3642	 ELGL4842	 ELGL6042 E	 ELGL7242 E	 ELGL3642 2W	 ELGL4842 2W
4-0 (1219) 4-0 1/4 (1226) 3-11 3/4 (1213) 3-5 3/4 (1059)	 ELGL3648	 ELGL4848 E	 ELGL6048 E	 ELGL7248 E	 ELGL3648 2W	 ELGL4848 E 2W
5-0 (1524) 5-0 1/4 (1530) 4-11 3/4 (1518) 4-5 3/4 (1384)	 ELGL3660	 ELGL4860 E	 ELGL6060 E	 ELGL7260 E	 ELGL3660 2W	 ELGL4860 E 2W

Construction Details

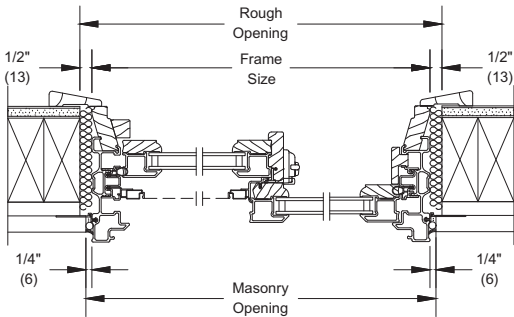


XO Operator Jamb

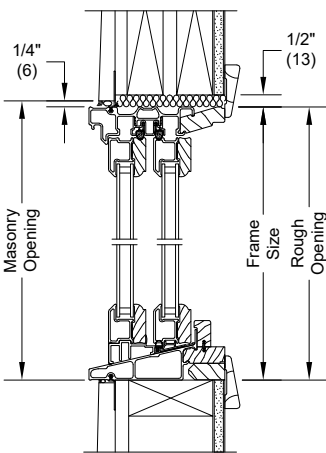

Head Jamb and Sill

Mullion Detail



Vertical Mullion
Operator Unit

Details and Elevations not to scale.

Special sized units available within product size matrix. See your Marvin retailer.

E = These windows meet National Egress Codes for fire evacuation. Local codes may differ.

* These windows meet National Egress Codes for fire evacuation if floor to sill height does not exceed 44" (118 mm). Local codes may differ.
XO operation standard, OX operation optional.
Optional Glider GBGs and SDLs are available in a standard Rectangular cut shown. Other available lite cuts shown on page 3.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.


GLIDER - TRIPLE SASH

1 Wide


MO (mm)	6-0 (1829)	7-0 (2134)	8-0 (2438)
RO (mm)	6-0 1/2 (1842)	7-0 1/2 (2146)	8-0 1/2 (2451)
FS (mm)	5-11 1/2 (1816)	6-11 1/2 (2121)	7-11 1/2 (2426)
2-0 (610)			
2-0 1/4 (616)			
1-11 3/4 (603)			
3-0 (914)			
3-0 1/4 (921)			
2-11 3/4 (908)			
3-6 (1067)			
3-6 1/4 (1073)			
3-5 3/4 (1060)			
4-0 (1219)			
4-0 1/4 (1226)			
3-11 3/4 (1213)			
5-0 (1524)			
5-0 1/4 (1530)			
4-11 3/4 (1518)			

ELGLTS7224	ELGLTS8424	ELGLTS9624
ELGLTS7236	ELGLTS8436	ELGLTS9636
ELGLTS7242	ELGLTS8442	ELGLTS9642
ELGLTS7248	ELGLTS8448	ELGLTS9648 E
ELGLTS7260	ELGLTS8460	ELGLTS9660 E

Construction Details

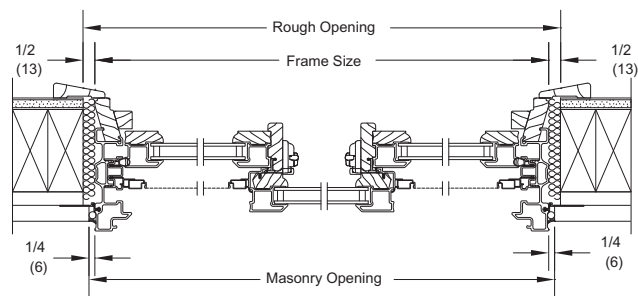

Triple Sash XO Operator Jamb

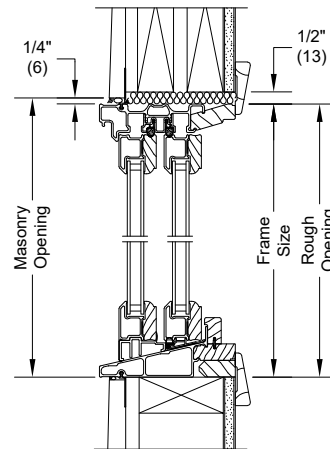

Head Jamb and Sill

MULTIPLE ASSEMBLIES

Multiple assemblies can be factory mulled.

MAXIMUM ROUGH OPENING not to exceed 113 1/2" x 60 1/4" Maximum up to 3 units wide by 1 unit high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.