


Casement - Multiple Assembly Samples


Casement Flankers with Center Picture

MO (mm)	8' - 0" (2438)	9' - 0" (2743)
RO (mm)	8' - 0" (2438)	9' - 0" (2743)
FS (mm)	7' - 11 1/2" (2426)	8' - 11 1/2" (2731)


3-5 3/4 (1060)	3-11 3/4 (1213)	4-5 3/4 (1365)	4-11 3/4 (1518)	5-5 3/4 (1670)
3-6 (1067)	4-0 (1219)	4-6 (1372)	5-0 (1524)	5-6 (1676)
3-5 1/2 (1054)	3-11 1/2 (1207)	4-5 1/2 (1359)	4-11 1/2 (1511)	5-5 1/2 (1664)




ESCA 2036/ESCAP4036/ESCA 2036




ESCA 2040/ESCAP4040/ESCA 2040




ESCA 2046/ESCAP4046/ESCA 2046



ESCA 2050/ESCAP4050/ESCA 2050




ESCA 2050/ESCAP 5050/ESCA2050




ESCA 2056/ESCAP 5056/ESCA2056


Construction Details

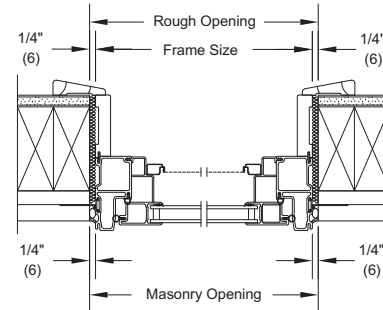

Jambs

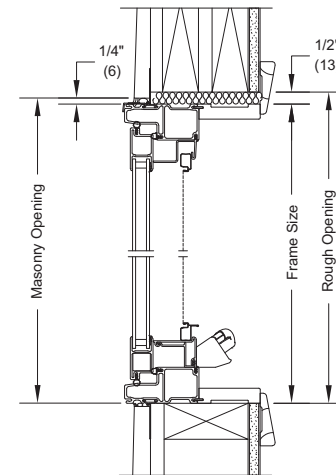

Head Jamb & Sill



Vertical Mull
Casement/Awning/Picture To
Casement/Awning/Picture



Horizontal Mull
Casement/Awning/Picture To
Casement/Awning/Picture

Details and Elevations not to scale.

Special sized units available within product size matrix. See your Marvin retailer.

E = These windows meet National Egress Codes for fire evacuation.

Local codes may differ.

T = Standard Tempered

Obscure Glass option available on all units.

GBG available in standard Rectangular lite cut, shown above. Other GBG lite cuts shown on page 5.

See page 58 for specific PG Ratings.

For further details and drawings visit the 'Technical Specifications' section at Marvin.com.

* These units may optionally include a window opening control device tested to ASTM F2090-10, which can be released from the inside without the use of a key, tool, special knowledge, or force greater than that required for normal unit operation.

WOCD not available on CN66 and CN70.

MULLED ASSEMBLIES

Units can be factory mulled.

MAXIMUM ROUGH OPENING not to exceed 114" x 84". Maximum up to 6 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 72" x 114". Maximum up to 1 unit wide by 5 units high.

For Multi-Wide Multi-High assemblies, MAXIMUM ROUGH OPENING not to exceed 96" x 96". Maximum up to 5 units wide by 5 units high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.